

## Data Sheet

# Steering Angle Sensor Absolute SASA



## Steering Wheel Position

The SASA sensor detects the absolute position and speed of the steering wheel. The sensor can be used in electro-hydraulic steering systems using Danfoss OSPE, EH or EHPS steering valves with programmable controllers.

The use of SASA sensor is relevant e.g. for variable steering ratio and closed loop set-ups where steering wheel position and steering angle have to match.

SASA is based on a noncontact inductive principle giving a very high resolution. The sensor features a robust design and resists e.g. electro-magnetic radiation. The output is a CAN signal, which makes it easy to interface to advanced vehicle controllers.

The steering wheel shaft turns the rotor of the SASA sensor, and the sensor is simply mounted between steering unit and steering column.



## Features

- High resolution  $<0.1^\circ$
- Output CAN signal
- High safety, "fail silent" concept
- Flanged in between steering unit and column
- Compact design


Comprehensive technical literature online  
at [powersolutions.danfoss.com](http://powersolutions.danfoss.com)

## Technical data

Steering wheel sensor SASA is used in different applications:  
Agriculture, Construction, Road building etc.

<b>Supply voltage</b>	9 - 32 V <sub>DC</sub>
<b>Mechanical input range</b>	Continuous 360° rotation
<b>Output</b>	CAN V2.0B passive (compatible to J1939); baudrate: 125, 250 or 500 kb/s; Angle: 12-bit word (0 - 4095) relative to a programmable 0-index point.
<b>Resolution</b>	<0.1°
<b>Linearity</b>	±1.0%
<b>Safety function</b>	If a failure occurs the CAN-bus will "fail silent" (The CAN-bus driver will be disabled).
<b>Temperature range</b>	-30° to 85°C [-22 to 185°F]
<b>Installation</b>	To be mounted between steering column and steering unit (OSP) with 4 bolts max 30 N·m [265.5 lbf·in]. Shaft in column must be 15 mm [0.59 in] longer. For use of original steering column, use adapter kit type SAK, see sketch below. Electric connection through cable mounted with an AMP Connector.


## SASA dimensions

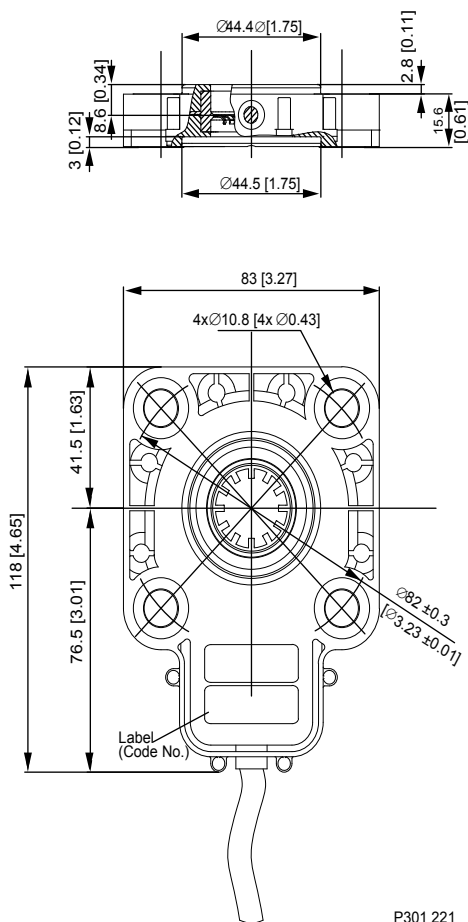

P301 221

## SAK dimensions

SAK adapter kit on SASA sensor and on OSP steering unit

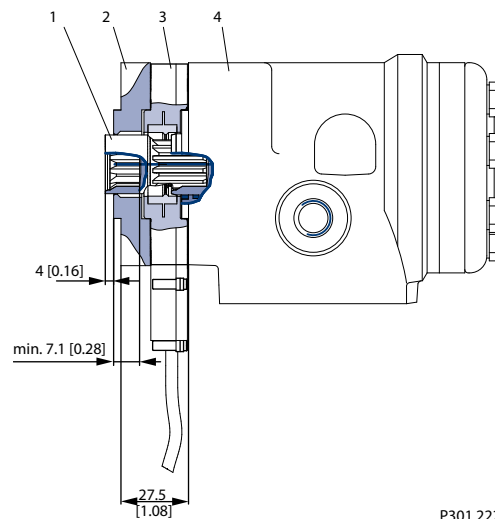

P301 222

1. Shaft of SAK adapter kit
2. Distance plate of SAK adapter kit
3. SASA sensor
4. OSP steering unit

1. Flexible teeth, 12 pieces to interact with splines on steering column
2. Cable, 500 mm with AMP connector type 2-967059-1

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.