

FB multiline lubrication pump

for grease and oil, electrically driven, for large multi-line and progressive systems



Design

- With up to 24 individually adjustable pump elements/outlets with various delivery volumes and tube connections
- With various delivery pistons (Ø 6 mm; Ø 8 mm; Ø 10 mm) for different delivery rates and operating pressures (350 bar, 200 bar and 125 bar).
- Positively actuated, adjustable pump elements for industrial applications and continuous operation
- With a delivery rate range from 0.04 to 7 cm³
- Reservoir sizes of 6, 15, or 30 kg
- Fill level control/fill level switch with 1 to 4 switching points
- SKF FB lubrication pumps can also be used as oil lubrication pumps.

Advantages

- Very sturdy and vibration-resistant multi-line pump, designed both for oil and very stiff greases, for harsh operating conditions, and for continuous operation if necessary
- Multiline lubrication pumps of the FB series are suitable for large systems due to their delivery rate and reservoir capacities.
- The lubricant can be fed to the lubrication points directly or via the SKF ProFlex progressive feeder system.

Application

- Automotive industry
- Construction materials machinery
- Conveying systems
- Annealing machines
- Steel and heavy industry
- Sewage treatment plants
- Paper and boxing machinery
- Refineries
- Tunnel boring machinery, mining
- Metal-forming machinery
- Wind energy systems

Table of contents

Pump operation 2
 Pump element operation 2
 Delivery volume adjustment on pump element 3
 General notes 3
 Pressure regulating valves for pump elements 3
 Design note 3
 Design 1M, drive position B 4
 Design 1M, drive position E 4
 Design 2M, drive position H 5
 Delivery volume of pump elements 6

Reservoir and fill level designs

For grease

Without fill level control X 6
 Visual fill level control G 7

Fill level switch

Fill level switch A 7
 Fill level switch E 8
 Fill level switch F 8
 Fill level switch H 9
 Fill level switch J 9

For oil

Fill level control S 10

Fill level switch

Fill level switch W 10

For grease and oil

Ultrasonic fill level switch

Description of design and operation ultrasonic sensor U2 11

Accessories 12



Explanation of order codes 15

Pump operation

- see Figure 1
 The pump is driven by a worm drive (5) consisting of a worm and related worm gear. The worm gear drives the eccentric drive shaft (4) with the fitted agitator (2). The agitator (2) works the grease and pushes the lubricant through the strainer (7) into the pump's inlet chamber. The eccentric drive shaft (4) has two guide rings running in ball bearings (9, 10) to receive the delivery piston heads of the pump elements (11). The eccentric movement of the guide rings (9, 10) forcibly moves the delivery pistons (suspended in the two guide rings) of the pump elements (11).

Pump element operation

- see Figure 2
 The delivery piston is forcibly actuated as described in "Pump operation."
 In the suction stroke position (as illustrated), the cross hole of the delivery piston (3) is closed. At the start of the pressure stroke, the delivery piston (1) closes the suction hole. The suctioned lubricant in chamber A is pressed against the spring-loaded control piston (3). The cross hole in the control piston (3) is opened. The lubricant reaches chamber B under pressure through the cross and longitudinal hole of the control piston (3), where it flows through the ring duct and the check valve (5) to the outlet.
 After the pressure stroke is complete, the suction stroke of the delivery piston (1) begins. Moving the delivery piston (1) also brings the control piston (3) back to its normal position using spring tension. The suction stroke movement of the delivery piston (1) generates negative pressure in chamber A. When the suction hole opens, the negative pressure draws the lubricant into chamber A. The pump element is now prepared for the next lubrication process.

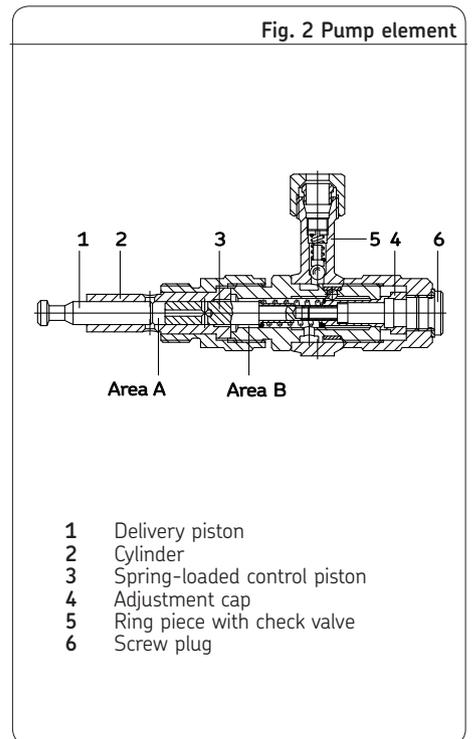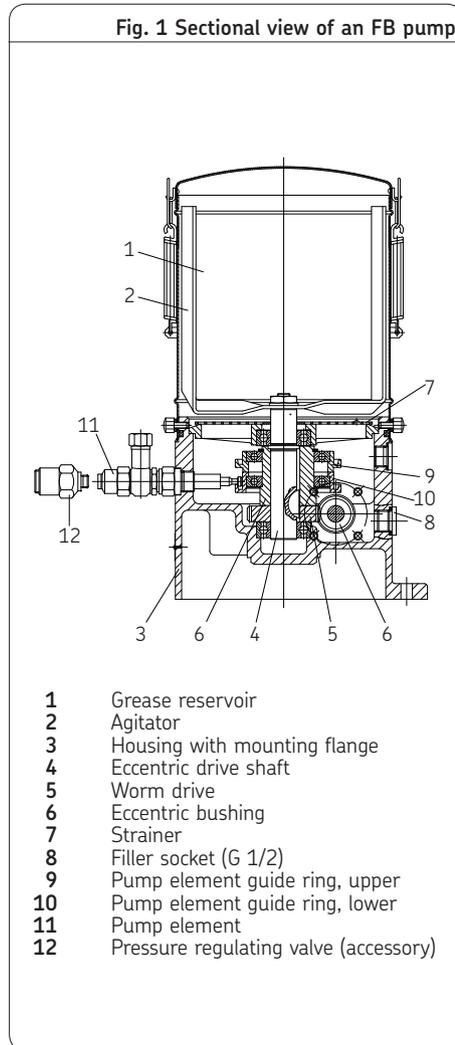

FB multiline lubrication pump

Delivery volume adjustment on pump element- see Figures 2 and 3

The delivery volume of the pump element is determined by the control piston stroke and the piston diameter. The screw plug (6) must be removed in order to adjust the delivery volume. The adjustment cap (4) can then be turned.

When adjusting:

- **Clockwise rotation**
results in decreased delivery volume
- **Counterclockwise rotation**
results in increased delivery volume
- Unless otherwise requested, the pump is configured when delivered for full stroke.

Note

We recommend that the delivery volume not be reduced below 1/3 of the maximum to achieve the specified characteristics. This corresponds to clockwise rotation of the adjustment cap (4) by eight notches.

General notes

The order of the pump elements is factory-set. It begins with the smallest pump elements. The order is shown in the following pump illustrations.

The order of the pump elements can be modified at additional charge.

The lubricants to be used must conform with the requirements of the machines being lubricated and be suitable for use in centralized lubrication systems.

Pressure regulating valves for pump elements

Pump elements can be equipped with pressure regulating valves (see Accessories). This involves replacing the screw plug (6) with the pressure regulating valve.

If necessary, grease/oil recirculation can be provided from the pressure regulating valve to the pump housing. This does, however, require a different pressure regulating valve with a G 1/4 outlet and a M20x1.5 threaded socket.

The threaded socket needs to be placed into an available mounting space (1 to 24) for pump elements and connected with the pressure regulating valve using tubing.

Pressure regulating valves for line installation can also be ordered as accessories.

Design note

The FB multiline pump is equipped standard with a motor protection enclosure of protection class IP 55 (07). The pump is available in a design for explosive atmospheres (ATEX) on request.

There are also different fill level switches for different applications and lubricants.


We recommend the U2 ultrasonic design as the standard fill level switch.

When the FB pump is used as an oil lubrication pump, the reservoir can be equipped with an oil level monitor, fill level switch "W". The oil level monitor is designed and fitted in accordance with the customer's specific requirements as stated when ordering. Additionally, a specialized filling device and a visual fill level indicator can be installed.

The FB multiline lubrication pump is available in the following special designs:

- ATEX design
- Pre-set delivery volumes
- Pre-installed pressure regulating valves
- Drive motor with custom voltage, custom frequency and custom protection class
- Custom paintwork

Fig. 3 Delivery volume adjustment on pump element

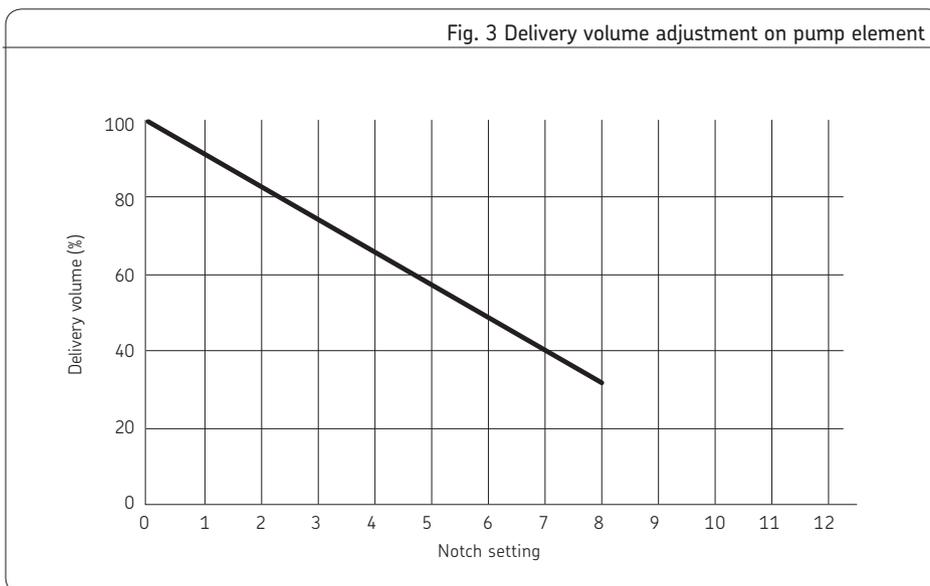

Delivery volume as a function of the notch setting on the pump element for piston diameters 6 mm, 8 mm and 10 mm

General characteristics 1M

General

Ambient and lubricant temperature range -15 °C to + 40 °C ¹⁾
 Reservoir B+H: 6, 15, 30 kg
 E: 6, 15 kg
 Number of pump elements
 Lower row 1 to 12, Upper row 13 to 24
 Filling filler socket G 1/2"
 Dry weight without pump elements
 FB 06 approx. 26 kg
 FB 15 approx. 28 kg
 FB 30 approx. 30 kg

Gearbox

Type worm drive
 1M double reduction
 Step-down ratios 1M 105:1; 288:1; 720:1

Motor

Standard design ... IP 55-F protection
 See key motor data table for 1 Mand motor rating plate. ²⁾

Pump

Type multiline lubrication pump 1 to 24 outlets

Operating pressure for pump elements, piston Ø
 6 mm max. 350 bar
 8 mm max. 200 bar
 10 mm max. 125 bar

Delivery volume of pump elements, piston Ø
 cm³/stroke
 6 mm 0.027 to 0.08
 8 mm 0.050 to 0.15
 10 mm 0.077 to 0.23


Lubricants ³⁾

- Mineral oils or environmentally compatible oils from ISO VG 46 to greases of NLGI Grade 3 (
- Operating viscosity (oil) ≥ 50 to 5000 mm²/s
 - Worked penetration (grease).....> 220 1/10 mm
 - max. flow pressure < 750 mbar
 - content in solids..... < 5%
 - after lubricant specification . DIN 51825


1) At higher ambient temperatures, note that there is reduction in (motor) performance of approx. 1% per Kelvin.
 2) Other specifications available on request.
 3) The use of synthetic and bio-degradable lubricants must be authorized by SKF.

FB design 1M

Drive position B

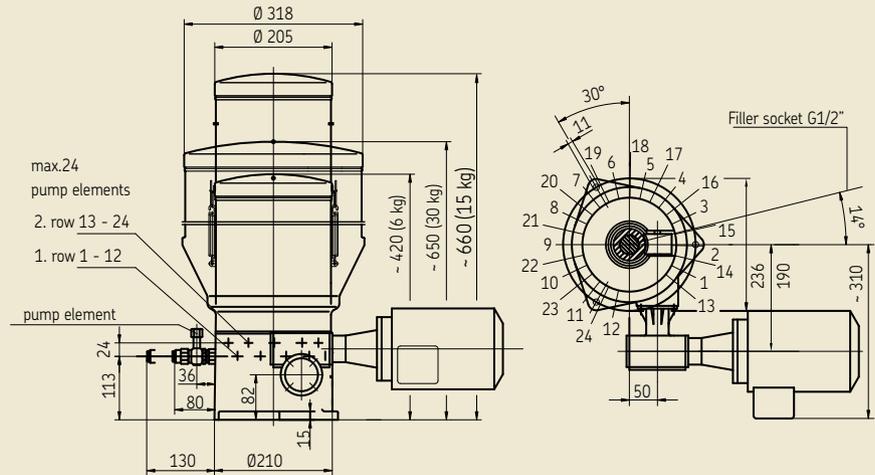

Drive position E

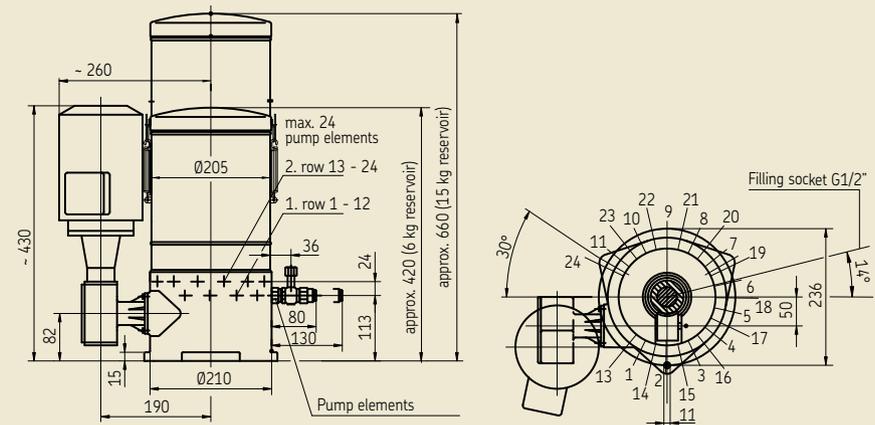

1M key motor data

Rated power [rpm]	Frequency voltage [Hz]	Rated current [kW]	Rated code [V]	Rated [A]	Orderspeed
1000	50	0.25	230/400	1.91/1.10	AG
			290/500	1.45/0.84	AL
			400/690	1.07/0.62	AP
1500	50	0.25	230/400	1.36/0.78	AF
			290/500	1.08/0.62	AK
			400/690	0.78/0.45	AO

Note This data refers to three-phase motors from VEM. There may be differences with motors from other manufacturers.

FB multiline lubrication pump

Design 2M, drive position H



General characteristics 2M

General

The general characteristics are identical to those of the 1M design (see page 4). They differ only in terms of gearbox design.

Gearbox

Type worm drive
 2 M single reduction
 Gear ratios 45:1


Motor

Standard design ...
 IP 55-F protection
 See key motor data table for 2M and motor rating plate. ¹⁾

¹⁾ Other specifications available on request.

FB design 2M

Drive position H

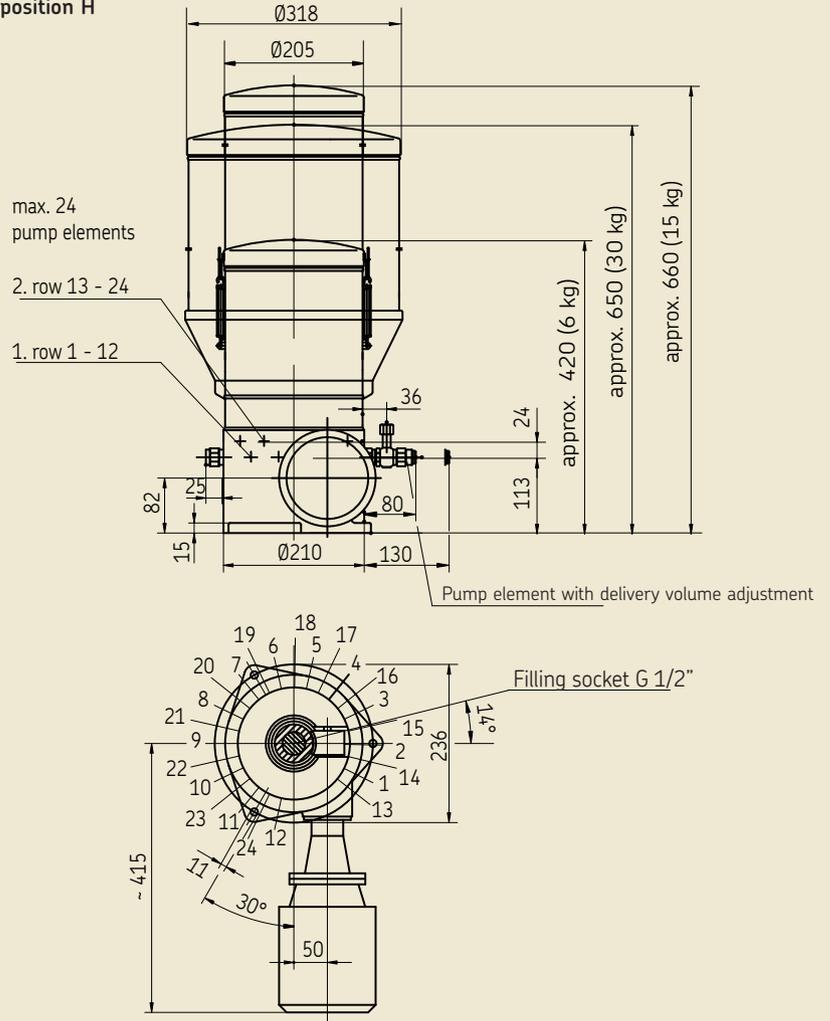

2M key motor data

Rated voltage [rpm]	Frequency [Hz]	Rated current [A]	Rated code [kW]	Rated [V]	Orderspeed [A]	power
1000	50	0.25	0.25	230/400	1.91/1.10	AG
				290/500	1.45/0.84	AL
				400/690	1.07/0.62	AP
1500	50	0.37	0.37	230/400	1.84/1.06	AF
				290/500	1.47/0.85	AK
				400/690	1.06/0.62	AO

Note This data refers to three-phase motors from VEM. There may be differences with motors from other manufacturers.

FB multiline lubrication pump

Delivery volume of pump elements with piston \varnothing 6 mm, 8 mm and 10 mm

The delivery volume per pump element depends on the speed of the motor drive shaft.


Note:

The delivery volumes shown are based on the motors' rated speeds. At reduced speeds (see rating plate), the values are lowered accordingly.


Legend

- 1 = maximum delivery volume at constant speed (100%)
- 2 = minimum delivery volume at constant speed (33%)
- 3 = adjustable delivery volume range


Delivery volume as a function of 6 mm piston diameter

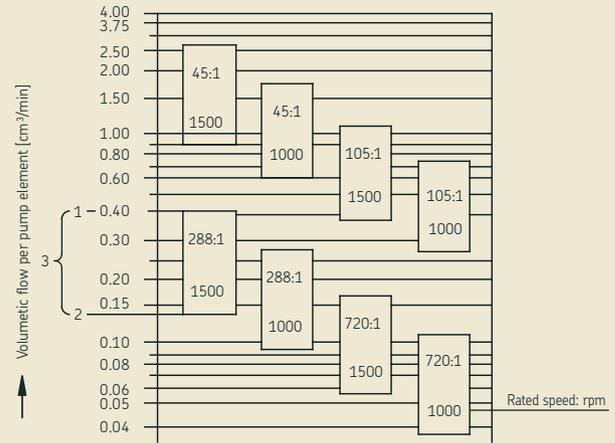

Delivery volume as a function of 8 mm piston diameter

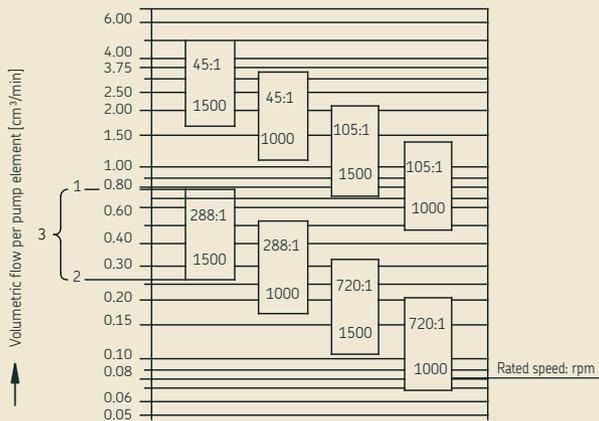

Delivery volume as a function of 10 mm piston diameter

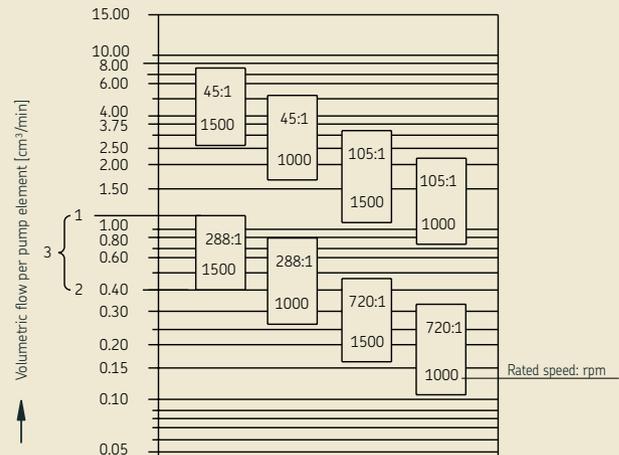

Reservoir and fill level designs

The reservoirs shown in the following are available in sizes 6 kg, 15 kg, and 30 kg, depending on the pump design. The reservoirs for oil contain a filler socket with strainer plus a visual oil level indicator (electric if desired); the agitator is not included in this version.

The accompanying fill level switches differ in terms of switching points and their characteristics.


Reservoir design X

Design without fill level control

Reservoir design X

Reservoir size [kg]	L1 [mm]	L2 [mm]	L3 [mm]
6	264		
15		504	
30			495

Reservoir design X

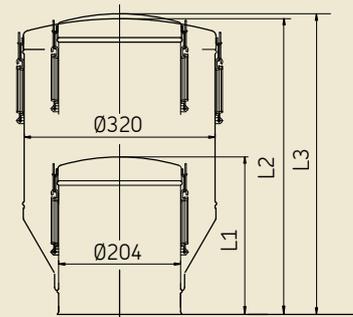

FB multiline lubrication pump

Visual fill level control for grease


Fill level control G

Design visual fill level indicator via dip stick (grease follower plate)

Fill level control G

Reservoir capacity [kg]	L3 [mm]	L4 max. [mm]
6	105	150
15	340	385
30	285	330

Fill level control G

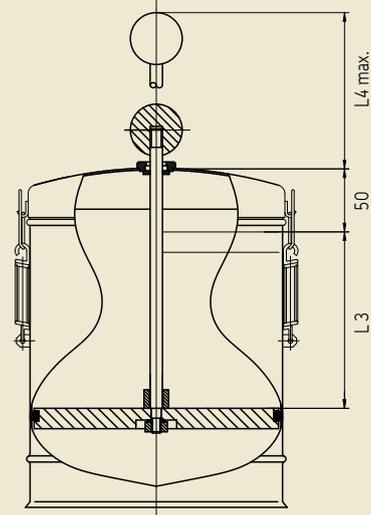

Fill level switch for grease

Fill level switch A with 3 switching points

Design position switch

Standard design (NO-contact)

- Maximum fill level contact 1+2 open contact 1+3 open
- Fill level pre-warning contact 1+2 closed contact 1+3 open
- Minimum fill level contact 1+2 closed contact 1+3 closed

Switched current, max. . 15 A with AC (with inductive load 0.25 A with DC)



Switching voltage, max. . 250 V to 380 V DC

Connection connector plug DIN EN175301-803
Protection IP 54
Visual fill level indicator via dip stick (grease follower plate)


Fill level switch A

Reservoir capacity [kg]	L3 [mm]	L4 max. [mm]
6	105	200
15	340	345
30	285	380


Fill level switch A ¹⁾

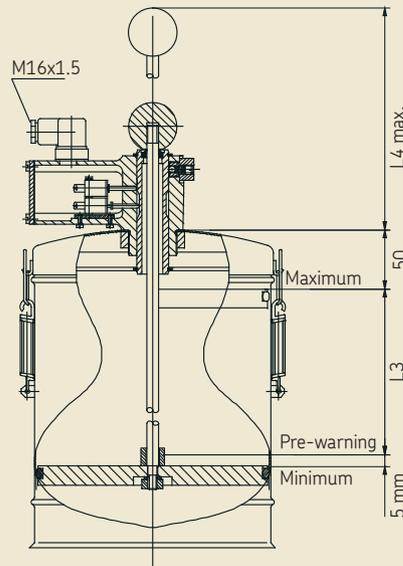

Switch position at maximum



Switch position at pre-warning



Switch position at minimum

1) Special design with cable break protection available on request

Connector pin assignment

PIN	Description
1	= + supply voltage
2	= signal output "above minimum"
3	= signal output "minimum"
4	= PE protective earth

Fill level switch E with 1 switching point

Designreed contact,
magnetically actuated

Switch design1 switching point
(min. changeover)

Switching capacity60 W/VA

Switched current, max. 1 A

Switching voltage, max. 230 V AC/DC



Connectionconnector plug
DIN 43 650

Protection classIP 65


Fill level switch E

Reservoir capacity [kg]	L3 [mm]
6	114
15	300
30	225

Fill level switch E

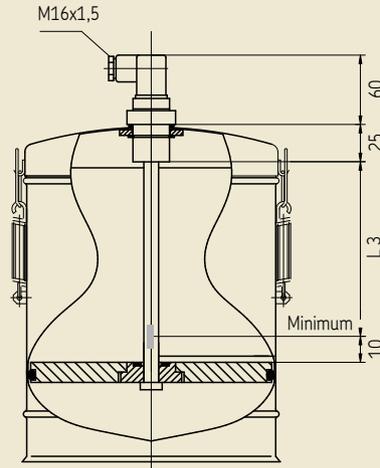

Switch position at minimum



Switch position above minimum

Connector pin assignment

PIN	Description
1	= + supply voltage
2	= signal output "above minimum"
3	= signal output "minimum"
4	= PE protective earth

Fill level switch F with 2 switching points

Designreed
contact,magnetically
actuated

Switch design2 switching points
(Min. - Max.)

Switched current, max. 1 A with AC/DC

Switching voltage, max. 42 V AC/
DC



Connectionconnector plug
DIN 43 650

Protection classIP 65


Fill level switch F

Reservoir capacity [kg]	L3 [mm]
6	114
15	300
30	225


Fill level switch F

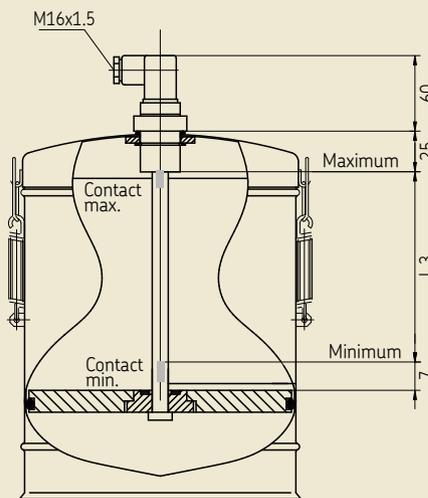

Switch position at minimum



Switch position between
maximum and minimum



Switch position at maximum

Connector pin assignment

PIN	Description
1	= + supply voltage
2	= signal output "above minimum"
3	= signal output "minimum"
4	= PE protective earth



Fill level switch H with 3 switching points

Design reed contact
 Switch design 3 switching points
 1. Maximum fill level . . . (NO-contact)
 2. Fill level pre-warning . . (NO-contact)
 3. Min. fill level (changeover)
 Switching capacity 60 W/VA
 Switched current, max. . .15 A
 Switching voltage, max. . .10-30 V DC/AC
 Connection connector plug
 DIN 43 651
 Protection class IP 65

Fill level switch H

Reservoir capacity [kg]	L3 [mm]	L4 [mm]
6	70	45
15	310	45
30	180	57

Fill level switch H

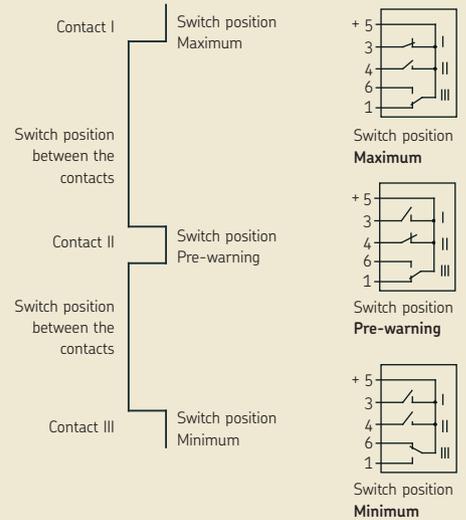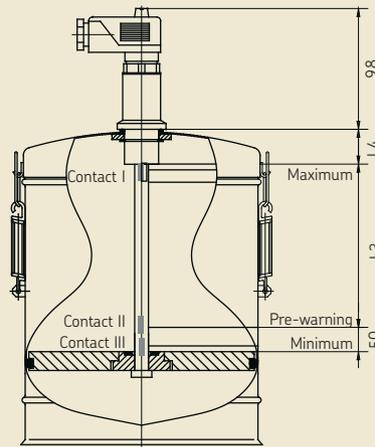


Fill level switch J with 4 switching points

Note
 Only for 30 kg reservoir design
 Proximity switches (4x)
 Design PNP, XOR, short circuit proof, reverse polarity protected
 Function indicator LED
 Switch design 1 switching point
 Switching capacity, max. 60 W/VA
 Switching voltage, max. 10-30 V DC/AC
 Connection via connector plug with 3 meter cable
 Protection class, IP 68
 plug/socket


Fill level switch J

Reservoir capacity	30 kg
--------------------	-------

Fill level switch J

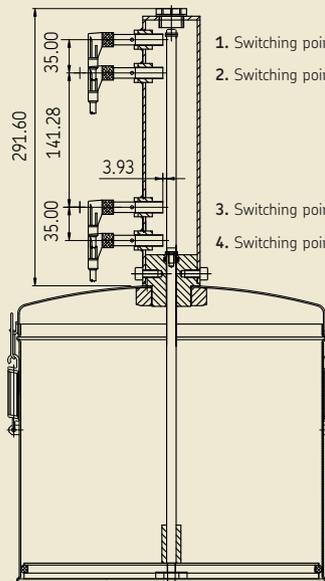

1. Switching point for max. fill level
2. Switching point for max. fill level pre-warning
3. Switching point for min. fill level pre-warning
4. Switching point for min. fill level

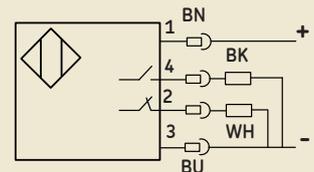

FB multiline lubrication pump

Fill level control for oil

Reservoir design S for oil


Design for oil lubrication pumps; with visual inspection, sight glass, filler socket with strainer on cover

Fill level switch W

Reservoir capacity

- 6 kg
- 15 kg
- 30 kg

Fill level control S

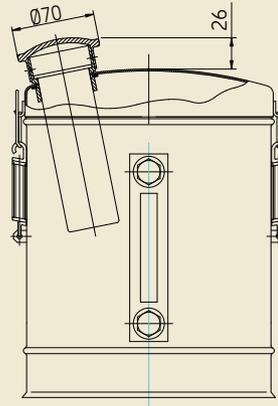

Fill level switch for oil

Fill level switch W with 1 switching point

Design reed contact, magnetically actuated

Switch design 1 switching point (min. changeover)

Switching capacity, max. . 100 W/ 40 VA

Switching voltage, max. 250 V AC/DC


Connection connector plug DIN 43 650

Protection class IP 65

Fill level switch W

Reservoir capacity	L3[kg]	[mm]
6	150	
15	400	
30	370	

Fill level switch W

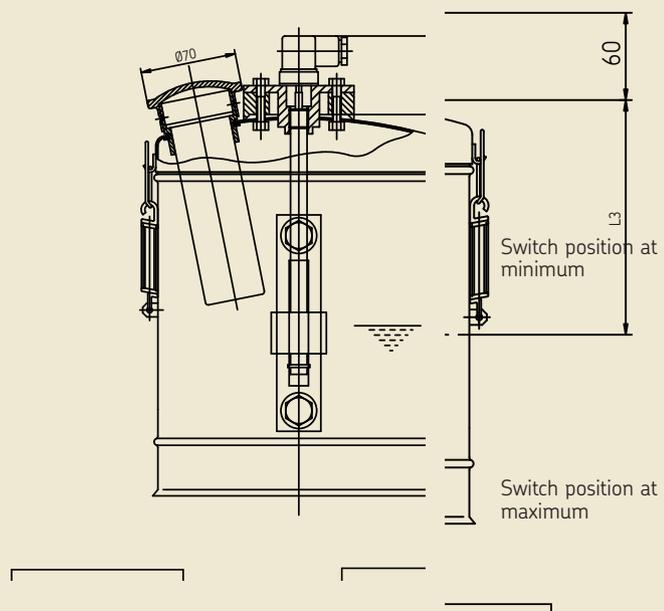

Fill level monitoring
U2 ultrasonic sensor with 2 switching points



The ultrasonic sensor works with a piezo-ceramic element as a sonic transmitter and receiver. A decoupling layer is used to decouple the ultrasound from the acoustically thinner air medium. The ultrasonic transducer is embedded water-tight in foam in the sensor's housing. The active area of the ultrasonic sensor is designated as the detection area and is limited by the shortest sensing distance (A_1) and longest sensing distance (A_2). These values depend on the size of the transducer. The transducer transmits a sound burst and converts the echo back into voltage.

The integrated controller uses the echo time and speed of sound to calculate the distance between the minimum (A_2) and maximum (A_1) fill level.


Note

The factory-set values can be changed by the customer at any time (teach-in).


Contact box is not part of the shipment.
Available for separate order.

Fill level switch U2 with 2 switching points





Reservoir design 6 kg and 15 kg

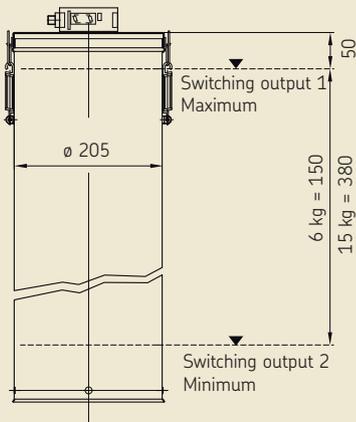

Reservoir design 30 kg

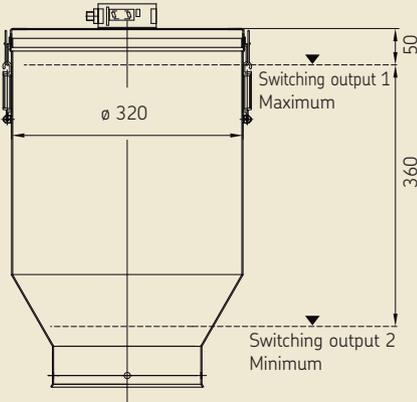

Standard symbol/connection:

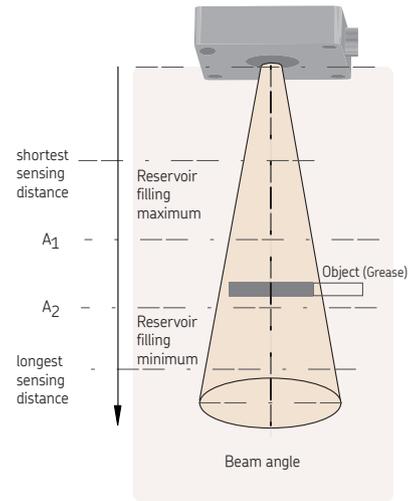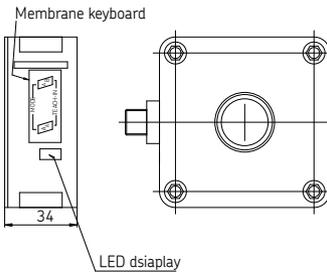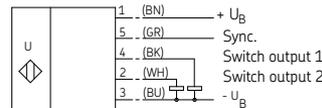

U2 Ultrasonic sensor characteristics

Design:
Ultrasonic sensor with two adjustable switching points (maximum, minimum)

Form of contact pnp, choice of NO-contact/NC contact
Ambient temperature -25 °C to +70 °C

Indicator
Yellow LED 1 constant: state of switching output 1 / flashing: teach-in function
Yellow LED 2 constant: state of switching output 2 / flashing: teach-in function
Red LED normal operation: "fault"/no lubricant detected

Electrical data
Operating voltage 10 to 30 V DC, ripple 10%
No-load current I_0 ≤ 50 mA
Protection class IP 65
Connection V15 connector socket (12Mx1), 5-pin

Description

Contact box (not part of the shipment)

Order No.

24-1882-2076

FB multiline lubrication pump



Accessories

(ordered separately)

Fitting mandrel (for installing a pump element)

Description
Fitting mandrel

Order No.
44-1827-2010

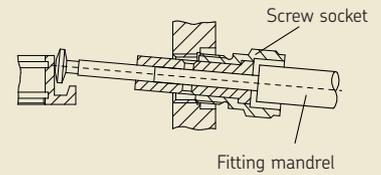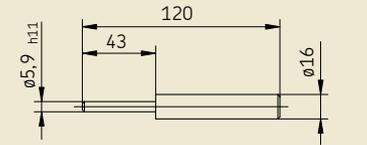


Fitting mandrel

Pump element with ring piece (for installing a pump element)

Description	Piston	WAF ₁ [kg/each]	WAF ₂	Weight	Order No.	∅
Pump element (pos.1 in figure)	6 mm	24	-	0.26	24-1557-3680	
	8 mm	24	-	0.26	24-1557-3681	
	10 mm	24	-	0.28	24-1557-3683	
Ring piece (pos.2 in figure)	6 mm	-	14	0.10	24-2255-2003	
	8 mm	-	17	0.08	24-2255-2004	
Tube diameter	10 mm	-	19	0.10	24-2255-2005	


Pump element

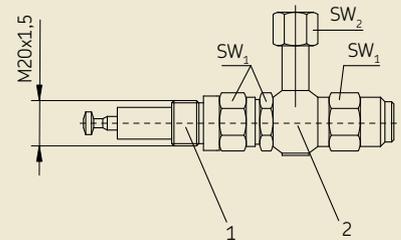


Pressure regulating valves for grease (for insertion into pump elements)

Set pressure [bar][kg/each]	Weight	Order No.
50	0.13	24-2103-2273
100		24-2103-2344
125		24-2103-2345
150		24-2103-2342
175		24-2103-2272
200		24-2103-2346
350		24-2103-2271


Pressure regulating valve

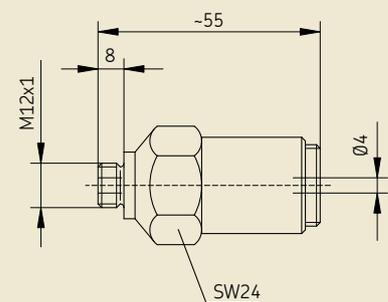


		Screw plug
		(for closing unused pump outlets)
Design	Weight kg/each	Order No.
M20x1.5	0.04	95-1520-0908

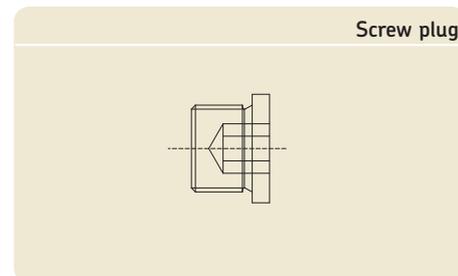


		Threaded socket for grease recirculation
		(in place of a pump element to recirculate grease into pump housing)
Design		Order No.
Steel, galvanized surface, with copper washer		24-1755-2003

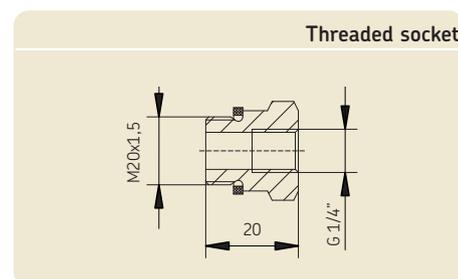

		Pressure gauge
Indicating range		Order No.
0 to 250 bar 0 to 3600 psi to 400 bar Washer ¹⁾		169-125-0000 169-140-001 248-610.02
<i>1) Washer must be ordered separately for each pressure gauge.</i>		

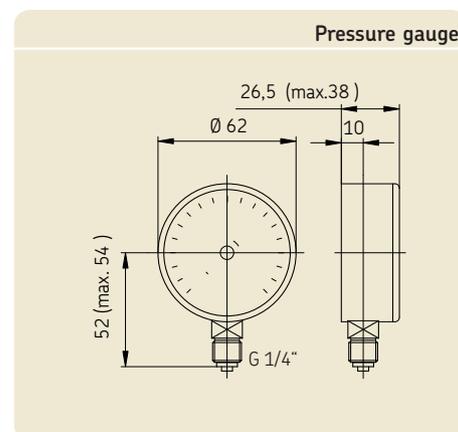

			Pressure gauge screw
Pos. 1	elbow fitting, directionally adjustable, according to DIN 2353		
	Tube external diameter	Thread	Order No.
	6 mm	M 12x1.5	443-406-061
	8 mm	M 14x1.5	443-408-081
	10 mm	M 16x1.5	443-410-101
Pos. 2	Pressure gauge screw		
	Tube external diameter	Thread	Order No.
	6 mm	M 12x1.5	441-406-061
	8 mm	M 14x1.5	96-0308-0060
	10 mm	M 16x1.5	96-0310-0060

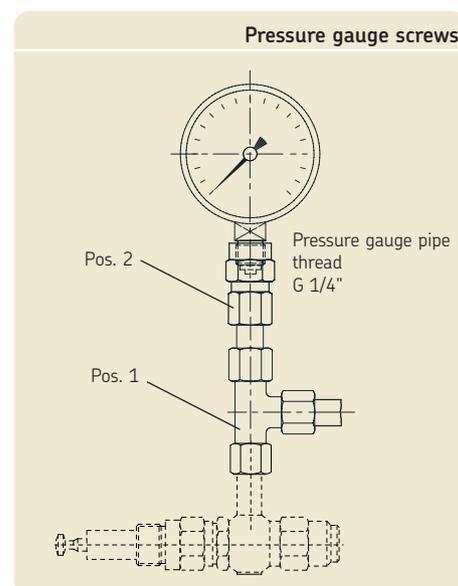


Reduction fitting with flat-type lubricant nipple for filling device

(for connecting a manual grease press)

Pos.	Description	Order No.
1	Reduction fitting RI 3/8x1/4 VZK EO	96-3120-0058
2	Washer A 17x21 DIN 7603 CU	DIN 7603A14x18Cu
3	Flat-type lubricant nipple AG 1/4-16 DIN 3404	96-0002-0053

Filling device with lubricant nipple

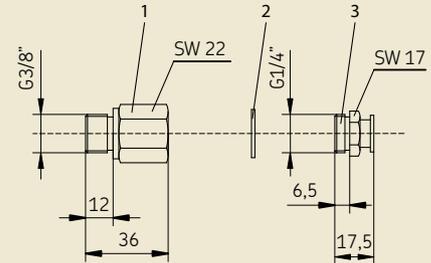


Filling device - quick-action coupling

(for connecting an automatic filling device)

Pos.	Description	Order No.
1	Reduction fitting RI 3/8x1/4 VZK EO	96-3120-0058
2	Washer A 17x21 DIN 7603 CU	DIN 7603A17x21CU
3	Filler socket	995-000-705
4	Coupling socket (for refill connection)	995-001-500
5	Hose fitting for connection to coupling socket Diameter (d) 13 mm Diameter (d) 16 mm	857-760-007 857-870-002


Filling device with quick-action coupling

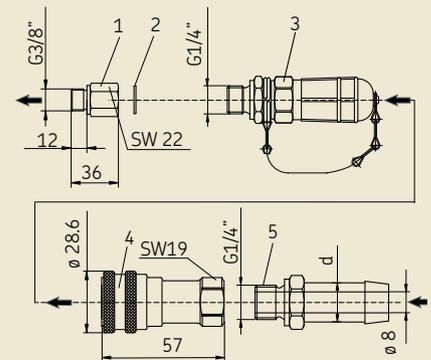

Coupling socket with cap for installation on a topping-up pump

Description	Order No.
Coupling socket with cap	995-001-509

Coupling socket with cap

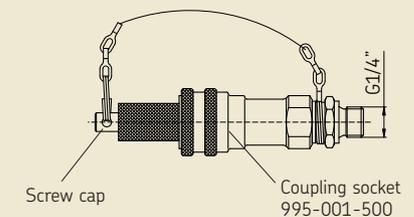

Manual topping-up pumps

Description	Order No.
With truck for 25 kg drum for 50 kg drum 169-000-054	169-000-042
Without truck for 25 kg drum 169-000-342	
Matching filler socket	995-000-705

Technical data

Delivery rate ~ 40 cm³/stroke

1) Note A generic pump is depicted; the actual pumps may differ in appearance.

Topping-up pump ¹⁾



Explanation of order codes

	FB 15 U2 1M 06 B 10 08 06 B D 0001 AG 07
Order example:	
Pump type FB	
Reservoir capacity	
06 = 6 kg; 15 = 15 kg; 30 = 30 kg	
Fill level control/fill level switch	
X = reservoir without fill level control/fill level switch	
For grease:	
G = visual fill level control (dip stick)	
E = fill level switch, 1 switching point (min.)	
F = fill level switch, 2 switching points (min., max.)	
H = fill level switch, 3 switching points (min., min. pre-warning, max.)	
A = fill level switch, 3 switching points (min., min. pre-warning, max.)	
J = fill level switch, 4 switching points (min., min. pre-warning, max. pre-warning, max.)	
For oil	
S = visual fill level control (sight glass)	
W = reed contact, 1 switching point (min.)	
For grease and oil	
U2 = ultrasonic sensor, 2 switching points (min., max.)	
Drive type	
1M = motor drive with double gear reduction	
2M = motor drive with single gear reduction	
Drive speed	
1M : 06 = 105:1; 07 = 288:1; 08 = 720:1	
2M : 04 = 45:1	
Drive position see pages 4 and 5	
1M = B or E (E for 6 and 15 kg reservoir only); 2M = H	
Number of pump elements	
Number of pump elements, piston Ø 6 mm	$\Sigma \leq 24$
Number of pump elements, piston Ø 8 mm	
Number of pump elements, piston Ø 10 mm	
Tube connection	
A -tube - Ø 6 mm; B -tube - Ø 8 mm; C -tube - Ø 10 mm; D - 1/4 NPT-internal thread	
D = modification letter	
Design key 0001 => basic design	
Motor data /protection class	
Motor data order code for rated speed, frequency, rated power, rated voltage, and rated current (see key motor data table, 1M and 2M, on pages 4 and 5)	
Motor protection class	
07 = IP55-F; 13 = Ex e IIC T3-IP55-F; 34 = Ex de IIC T4-IP55-F (other specifications available on request)	

Order example: For a pump unit of type **FB** with a 15 kg reservoir (**15**), with ultrasonic sensor (**U2**), drive type 1M (**1M**) with a drive speed 06 (105:1) (**06**), drive position B (**B**), 10 pump elements with Ø 6 mm (**10**), 8 pump elements with Ø 8 mm (**08**), 6 pump elements with Ø 10 mm (**06**), tube connection B with Ø 8mm (**B**), modification letter D (**D**), basic design (**0001**), motor values (1M) for rated speed 1000 rpm, rated voltage 230/400 V (**AG**), protection class IP55 (**07**), the order number is: **FB 15 U2 1M 06 B 10 08 06 B D 0001 AG 07**.

Order number: 1-3026-EN

Subject to change without notice. (7/2014)

Important information on product usage

All products from SKF may be used only for their intended purpose as described in this brochure and the operating instructions. If operating instructions are supplied together with the products, they must be read and followed.

Not all lubricants can be fed using centralized lubrication systems. SKF can, on request, inspect the feedability of the lubricant selected by the user in centralized lubrication systems. Lubrication systems and their components manufactured by SKF are not approved for use in conjunction with gases, liquefied gases, pressurized gases in solution, vapors or such fluids whose vapor pressure exceeds normal atmospheric pressure (1013 mbar) by more than 0.5 bar at their maximum permissible temperature. In particular, we call your attention to the fact that hazardous materials of any kind, especially the materials classified as hazardous by EC Directive 67/548/EEC, Article 2, Para. 2, may only be filled into SKF centralized lubrication systems and components and delivered and/or distributed with the same after consultation with and written approval from SKF.

Brochure note

- 1-3025-EN FF multiline pump unit
- 951-170-201-EN Operating Instructions for FF/FB multiline pump unit
- 1-3030-EN Reservoir pump units of the KFG series for industrial use
- 1-3034-EN Reservoir pump units of the KFG series for rotary application
- 1-3035-EN Reservoir pump units of the KFG series for use in vehicles

SKF Lubrication Systems Germany GmbH

Industriestrasse 4 · 68766 Hockenheim · Germany
Tel. +49 (0)62 05 27-0 · Fax +49 (0)62 05 27-101
www.skf.com/lubrication

This brochure was presented to you by:

® SKF is a registered trademark of the SKF Group.

© SKF Group 2014

The contents of this publication are the copyright of the publisher and may not be reproduced in full or in part without prior written consent of SKF. Every care has been taken to ensure the accuracy of the information contained in this publication. However, no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of use of the information contained herein.

