




VOLTMETER

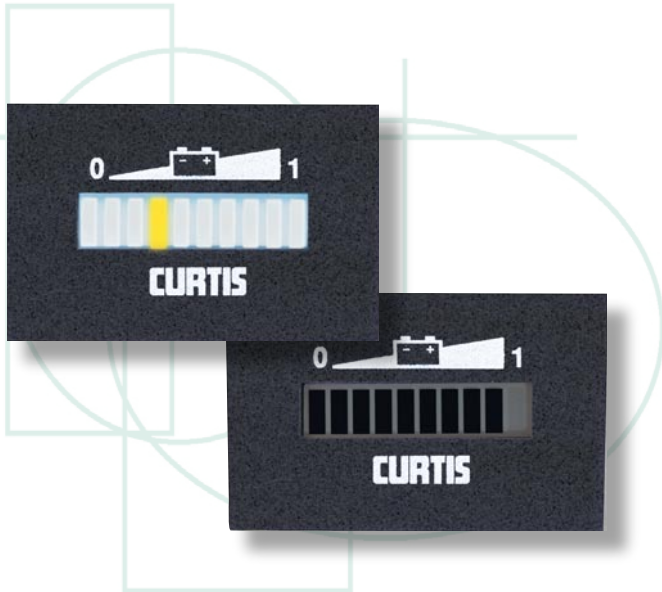

DESCRIPTION

The Curtis enGage™ I voltmeter is a cost effective, accurate, solid state instrument for displaying battery state of charge information as provided by a BDI capable Curtis motor speed controller. Two display formats are available, LED and LCD.

Models 2114Z – LED display

Models 2314Z – LCD display (backlit)

APPLICATION

The enGage™ I Voltmeter is ideal for use in a variety of battery powered applications including those associated with durable medical and material handling vehicles.

QUALITY COMPLIANCE

Manufactured under ISO 9001 certified Quality Management System. UL recognized & CE certified.

FEATURES

- Easy to read tri-color LED for “status at a glance” or models with LCD for superior visibility in bright daylight conditions.
- Eye catching, flashing segments indicate operation beyond established parameters, such as low discharge level.
- 10 bar LED or LCD displays the state of charge successively, bar by bar, from full to empty.
- At 70% depth of discharge, a flashing bar signals “energy reserve” alert.
- At 80% depth of discharge, double flashing bars signals “empty” status warning.
- Recognizes improperly charged battery.
- Programmed by Curtis to work seamlessly with Curtis motor speed controllers that feature Curtis BDI output.
- Keyswitch activated display with continuous battery discharge monitoring.
- “Fast mounting” design that requires only a bracket for easy installation.
- Compact enclosure is sealed to IP 65 front and rear.
- 12, 24, 36, and 48VDC voltage ratings available.
- 0 V (empty) – 5 V (full) input.

CURTIS INSTRUMENTS, INC.

200 KISCO AVENUE
MT. KISCO, NY 10549 USA
TEL (914) 666-2971
FAX (914) 666-2188

CURTIS INSTRUMENTS, (UK) LTD.

5 UPPER PRIORY STREET
NORTHAMPTON NN1 2PT, ENGLAND
TEL 44 (0) 1604-629755
FAX 44 (0) 1604-629876

CURTIS INSTRUMENTS INDIA PRIVATE LTD.

1199, GHOLE ROAD
PUNE 411004, INDIA
TEL 91 (0) 20-5531288
FAX 91 (0) 20-5539192

VOLTMETER

MODEL ENCODEMENT


Model	Case	Voltage	Sequential	OEM Artwork
2114	Z	12*	-0001	OO
2314	Z	12*	-0001	OO

*or one of the following: 24, 36, 48.

SPECIFICATIONS

Display:	10 bar LED (5 green, 3 yellow, 2 red); 10 bar LCD 5 mm high
Humidity:	95% non-condensing
Operating Temperature:	-40°C to +85°C
Storage Temperature:	-50°C to +85°C
Mechanical Shock:	SAE J 1378, 55g
Mechanical Vibration:	SAE J 1378, 20g
Current Consumption:	LED 21.7mA (Max value, 12V Nominal System Voltage) LCD With Backlighting 36.2 mA (Max value, 12VDC Nominal System Voltage) Higher system voltages yield lower max current values.
Input Signal:	0 VDC (empty) – 5 VDC (Full)

DIMENSIONS mm

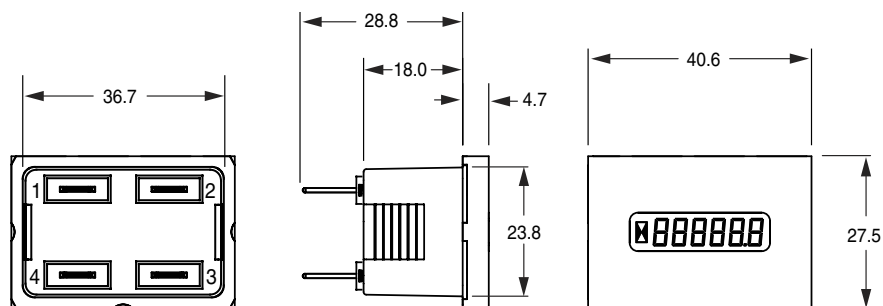

WARRANTY Two year limited warranty from time of delivery.