



RR2500

IT EN DE FR ES PT

RR2500 | L.. | .. | i



| i | 1/... | T ₂ [Nm] | | | | | | n _{1max} | T _{2max} | P _t |
|-----------|----------------|-----------------------------|-----------------------------------|---------------------------------|------------------------------|----------------------------------|-------------------------------|-------------------|-------------------|----------------|
| | | 10000 (10 ⁴) | 25000 (2.5 · 10 ⁴) | 50000 (5 · 10 ⁴) | 100000 (10 ⁵) | 500000 (5 · 10 ⁵) | 1000000 (10 ⁶) | | | |
| RR2500 L1 | 4.00 | 29900 | 27820 | 25110 | 23000 | 19520 | 15860 | 2000 | 37000 | 38 |
| | 4.71 | 26350 | 23210 | 20210 | 19060 | 17270 | 15560 | 2000 | 37000 | 38 |
| | 5.85 | 20100 | 16730 | 14870 | 14250 | 12910 | 12370 | 2000 | 37000 | 38 |
| RR2500 L2 | 15.69 | 29900 | 27820 | 25110 | 23000 | 18460 | 15000 | 3000 | 37000 | 23 |
| | 17.22 | 29900 | 27820 | 25110 | 23000 | 18200 | 14780 | 3000 | 37000 | 23 |
| | 21.88 | 24540 | 21800 | 20890 | 20030 | 17710 | 14380 | 3000 | 37000 | 23 |
| | 25.74 | 26350 | 23210 | 20210 | 19060 | 17270 | 15560 | 3000 | 37000 | 23 |
| | 30.25 | 20480 | 19130 | 18330 | 17570 | 15920 | 15260 | 3000 | 37000 | 23 |
| | 37.58 | 20100 | 16730 | 14870 | 14250 | 12910 | 12370 | 3000 | 37000 | 23 |
| | 46.24 | 16280 | 15390 | 14750 | 14140 | 12810 | 12280 | 3000 | 37000 | 23 |
| | 50.28 | 16300 | 15400 | 14750 | 14130 | 12800 | 12260 | 3000 | 37000 | 23 |
| | 53.35 | 29900 | 27820 | 25110 | 23000 | 18460 | 15000 | 3500 | 37000 | 17 |
| RR2500 L3 | 62.77 | 29900 | 27820 | 25110 | 23000 | 18460 | 15000 | 3500 | 37000 | 17 |
| | 68.87 | 29900 | 27820 | 25110 | 23000 | 18200 | 14780 | 3500 | 37000 | 17 |
| | 86.09 | 26640 | 25180 | 24130 | 23000 | 18200 | 14780 | 3500 | 37000 | 17 |
| | 99.86 | 23560 | 22280 | 21360 | 20480 | 18200 | 14780 | 3500 | 37000 | 17 |
| | 109.41 | 24540 | 21800 | 20890 | 20030 | 17710 | 14380 | 3500 | 37000 | 17 |
| | 126.92 | 24540 | 21800 | 20890 | 20030 | 17710 | 14380 | 3500 | 37000 | 17 |
| | 149.31 | 26350 | 23210 | 20210 | 19060 | 17270 | 15560 | 3500 | 37000 | 17 |
| | 180.21 | 24520 | 23190 | 20210 | 19060 | 17270 | 15560 | 3500 | 37000 | 17 |
| | 211.76 | 20480 | 19130 | 18330 | 17570 | 15920 | 15260 | 3500 | 37000 | 17 |
| | 263.08 | 20100 | 16730 | 14870 | 14250 | 12910 | 12370 | 3500 | 37000 | 17 |
| | 323.66 | 16280 | 15390 | 14750 | 14140 | 12810 | 12280 | 3500 | 37000 | 17 |
| | 351.94 | 16300 | 15400 | 14750 | 14130 | 12800 | 12260 | 3500 | 37000 | 17 |
| RR2500 L4 | 245.62 | 29900 | 27820 | 25110 | 23000 | 18460 | 15000 | 3500 | 37000 | 13 |
| | 289.25 | 29900 | 27820 | 25110 | 23000 | 17850 | 14500 | 3500 | 37000 | 13 |
| | 340.30 | 29900 | 27820 | 25110 | 23000 | 18200 | 14780 | 3500 | 37000 | 13 |
| | 398.46 | 29900 | 27820 | 25110 | 23000 | 18200 | 14780 | 3500 | 37000 | 13 |
| | 498.07 | 26640 | 25180 | 24130 | 23000 | 18200 | 14780 | 3500 | 37000 | 13 |
| | 610.43 | 26640 | 25180 | 24130 | 23000 | 18200 | 14780 | 3500 | 37000 | 13 |
| | 708.10 | 23560 | 22280 | 21360 | 20480 | 18200 | 14780 | 3500 | 37000 | 13 |
| | 775.83 | 24540 | 21800 | 20890 | 20030 | 17710 | 14380 | 3500 | 37000 | 13 |
| | 899.96 | 24540 | 21800 | 20890 | 20030 | 17710 | 14380 | 3500 | 37000 | 13 |
| | 1058.78 | 26350 | 23210 | 20210 | 19060 | 17270 | 15560 | 3500 | 37000 | 13 |
| | 1277.84 | 24520 | 23190 | 20210 | 19060 | 17270 | 15560 | 3500 | 37000 | 13 |
| | 1501.60 | 20480 | 19130 | 18330 | 17570 | 15920 | 15260 | 3500 | 37000 | 13 |
| | 1639.34 | 16280 | 15390 | 14750 | 14140 | 12810 | 12280 | 3500 | 37000 | 13 |
| | 1865.45 | 20100 | 16730 | 14870 | 14250 | 12910 | 12370 | 3500 | 37000 | 13 |
| | 2295.07 | 16280 | 15390 | 14750 | 14140 | 12810 | 12280 | 3500 | 37000 | 13 |
| | 2495.56 | 16300 | 15400 | 14750 | 14130 | 12800 | 12260 | 3500 | 37000 | 13 |



RR2500

A..

..

i



| i | T ₂ [Nm] | | | | | | $n_{1\max}$ [min ⁻¹] | T _{2max} [Nm] | P _t [kW] | |
|----------------------|-----------------------------|-----------------------------------|---------------------------------|------------------------------|----------------------------------|-------------------------------|-------------------------------------|---------------------------|------------------------|----|
| | n ₂ x h | | | | | | | | | |
| 1/... | 10000 (10 ⁴) | 25000 (2.5 · 10 ⁴) | 50000 (5 · 10 ⁴) | 100000 (10 ⁵) | 500000 (5 · 10 ⁵) | 1000000 (10 ⁶) | | | | |
| RR2500 A2 (A) | 10.91 | 24420 | 24420 | 20490 | 16640 | 10270 | 8340 | 2500 | 37000 | 34 |
| | 12.83 | 26350 | 23210 | 20210 | 18650 | 11510 | 9350 | 2500 | 37000 | 34 |
| | 15.53 | 24990 | 23210 | 20210 | 17960 | 11080 | 9000 | 2500 | 37000 | 34 |
| | 18.30 | 22510 | 22510 | 20210 | 16950 | 10460 | 8490 | 2500 | 37000 | 34 |
| | 19.29 | 20100 | 16730 | 14870 | 14250 | 12900 | 10470 | 2500 | 37000 | 34 |
| | 22.74 | 20100 | 16730 | 14870 | 14250 | 12170 | 9890 | 2500 | 37000 | 34 |
| (B) | 11.08 | 28090 | 27130 | 24330 | 19760 | 12200 | 9910 | 2500 | 37000 | 38 |
| | 13.03 | 26350 | 23210 | 20210 | 19060 | 13660 | 11100 | 2500 | 37000 | 38 |
| | 14.90 | 26350 | 23210 | 20210 | 19060 | 13840 | 11240 | 2500 | 37000 | 38 |
| | 19.25 | 22240 | 22030 | 20210 | 19060 | 13750 | 11170 | 2500 | 37000 | 38 |
| | 23.92 | 20100 | 16730 | 14870 | 14250 | 12910 | 12370 | 2500 | 37000 | 38 |
| (C) | 9.85 | 29900 | 27820 | 25110 | 23000 | 19520 | 15860 | 2000 | 37000 | 50 |
| | 12.67 | 29900 | 27820 | 25110 | 23000 | 19520 | 15860 | 2000 | 37000 | 50 |
| | 15.27 | 29900 | 27820 | 25110 | 23000 | 19520 | 15860 | 2000 | 37000 | 50 |
| | 17.97 | 26350 | 23210 | 20210 | 19060 | 17270 | 15560 | 2000 | 37000 | 50 |
| | 22.32 | 20100 | 16730 | 14870 | 14250 | 12910 | 12370 | 2000 | 37000 | 50 |
| RR2500 A3 | 42.25 | 29900 | 26220 | 21300 | 17300 | 10670 | 8670 | 3500 | 37000 | 20 |
| | 46.35 | 29900 | 27820 | 22730 | 18460 | 11390 | 9250 | 3500 | 37000 | 20 |
| | 54.30 | 28840 | 27560 | 22380 | 18180 | 11220 | 9110 | 3500 | 37000 | 20 |
| | 58.91 | 24540 | 21800 | 20890 | 20030 | 13470 | 10940 | 3500 | 37000 | 20 |
| | 69.01 | 24540 | 21800 | 20890 | 20030 | 13270 | 10780 | 3500 | 37000 | 20 |
| | 81.19 | 26350 | 23210 | 20210 | 19060 | 14870 | 12080 | 3500 | 37000 | 20 |
| | 87.53 | 24540 | 21800 | 20890 | 20030 | 12710 | 10320 | 3500 | 37000 | 20 |
| | 95.41 | 20480 | 19130 | 18330 | 17570 | 15920 | 13520 | 3500 | 37000 | 20 |
| | 102.98 | 26350 | 23210 | 20210 | 19060 | 14240 | 11570 | 3500 | 37000 | 20 |
| | 121.01 | 20480 | 19130 | 18330 | 17570 | 15920 | 12950 | 3500 | 37000 | 20 |
| | 150.33 | 20100 | 16730 | 14870 | 14250 | 12910 | 12370 | 3500 | 37000 | 20 |
| | 184.95 | 16280 | 15390 | 14750 | 14140 | 12810 | 12280 | 3500 | 37000 | 20 |
| | 201.11 | 16300 | 15400 | 14750 | 14130 | 12800 | 12260 | 3500 | 37000 | 20 |
| RR2500 A4 | 121.95 | 25820 | 19620 | 15930 | 12940 | 7990 | 6490 | 3500 | 37000 | 15 |
| | 157.42 | 29900 | 23460 | 19050 | 15480 | 9550 | 7760 | 3500 | 37000 | 15 |
| | 196.77 | 26640 | 25180 | 22270 | 18090 | 11160 | 9070 | 3500 | 37000 | 15 |
| | 202.26 | 29900 | 23280 | 18910 | 15360 | 9480 | 7700 | 3500 | 37000 | 15 |
| | 221.91 | 29900 | 24840 | 20180 | 16390 | 10110 | 8210 | 3500 | 37000 | 15 |
| | 250.08 | 24540 | 21800 | 20890 | 20030 | 13200 | 10720 | 3500 | 37000 | 15 |
| | 277.39 | 26640 | 25180 | 23590 | 19160 | 11820 | 9600 | 3500 | 37000 | 15 |
| | 290.10 | 24540 | 21800 | 20890 | 20030 | 14650 | 11900 | 3500 | 37000 | 15 |
| | 321.77 | 23560 | 22280 | 21360 | 20480 | 13120 | 10650 | 3500 | 37000 | 15 |
| | 352.55 | 24540 | 21800 | 20890 | 20030 | 13980 | 11360 | 3500 | 37000 | 15 |
| | 408.96 | 24540 | 21800 | 20890 | 20030 | 15510 | 12600 | 3500 | 37000 | 15 |
| | 481.13 | 26350 | 23210 | 20210 | 19060 | 17270 | 14120 | 3500 | 37000 | 15 |
| | 580.67 | 24520 | 23190 | 20210 | 19060 | 17270 | 15560 | 3500 | 37000 | 15 |
| | 682.35 | 20480 | 19130 | 18330 | 17570 | 15920 | 15260 | 3500 | 37000 | 15 |
| | 879.30 | 26350 | 23210 | 20210 | 19060 | 14340 | 11650 | 3500 | 37000 | 15 |
| | 1061.22 | 24520 | 23190 | 20210 | 19060 | 16350 | 13280 | 3500 | 37000 | 15 |
| | 1247.06 | 20480 | 19130 | 18330 | 17570 | 15920 | 14870 | 3500 | 37000 | 15 |
| | 1549.23 | 20100 | 16730 | 14870 | 14250 | 12910 | 12370 | 3500 | 37000 | 15 |
| | 1906.02 | 16280 | 15390 | 14750 | 14140 | 12810 | 12280 | 3500 | 37000 | 15 |
| | 2072.53 | 16300 | 15400 | 14750 | 14130 | 12800 | 12260 | 3500 | 37000 | 15 |




RR2500

IT EN DE FR ES PT

RR2500 L... .. i




L1

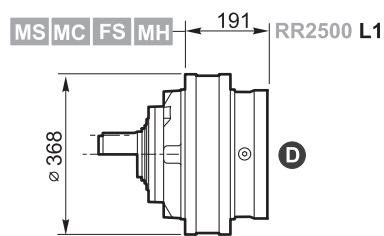


D

L2

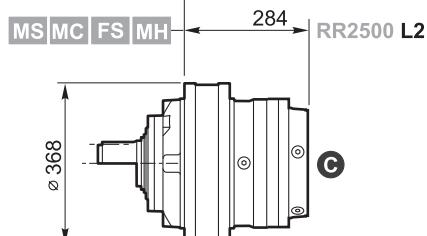


C

L3


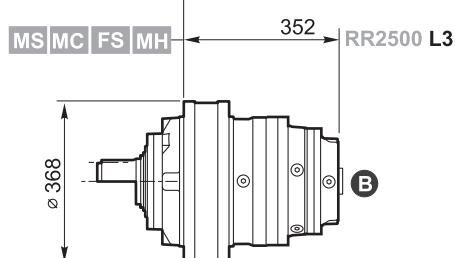


B


L4

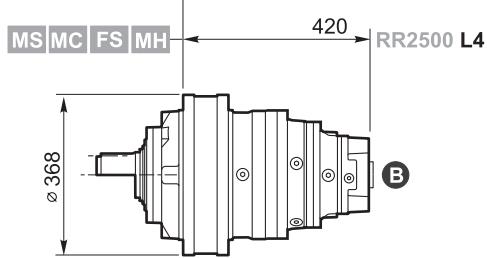


B

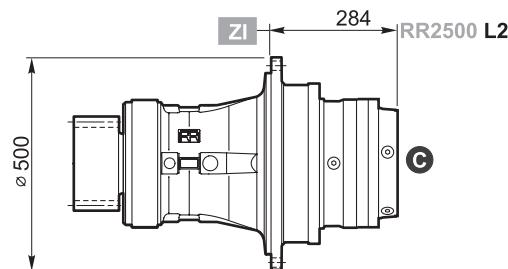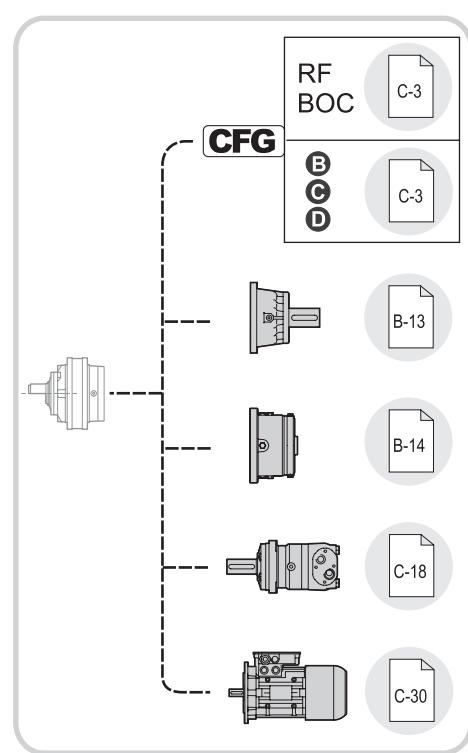

ZI

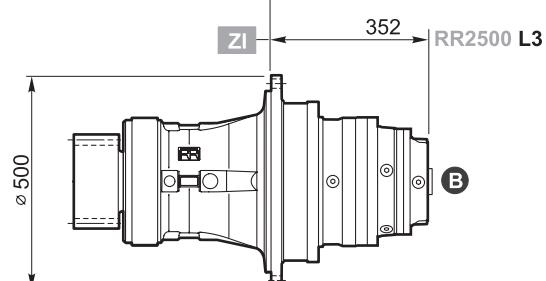



ZI

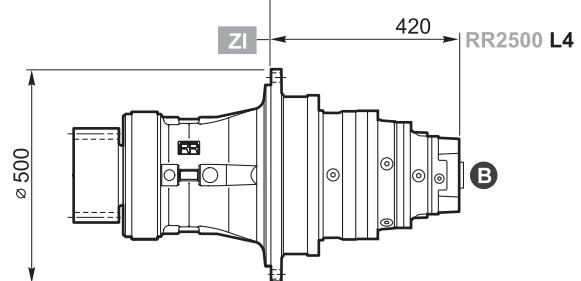


ZI



RR2500 A.. .. i


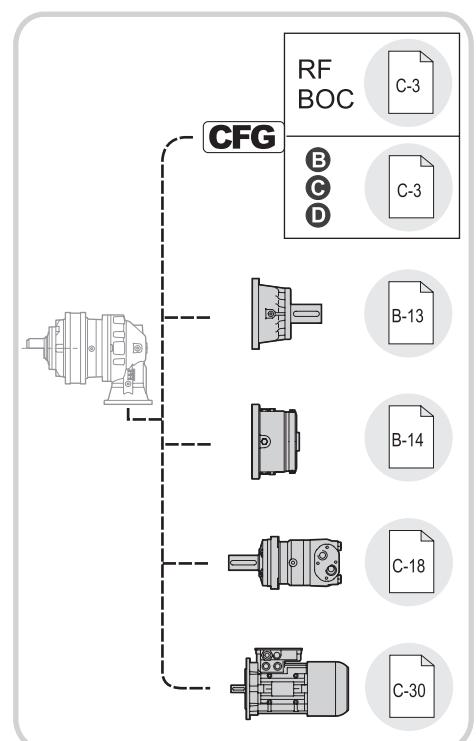
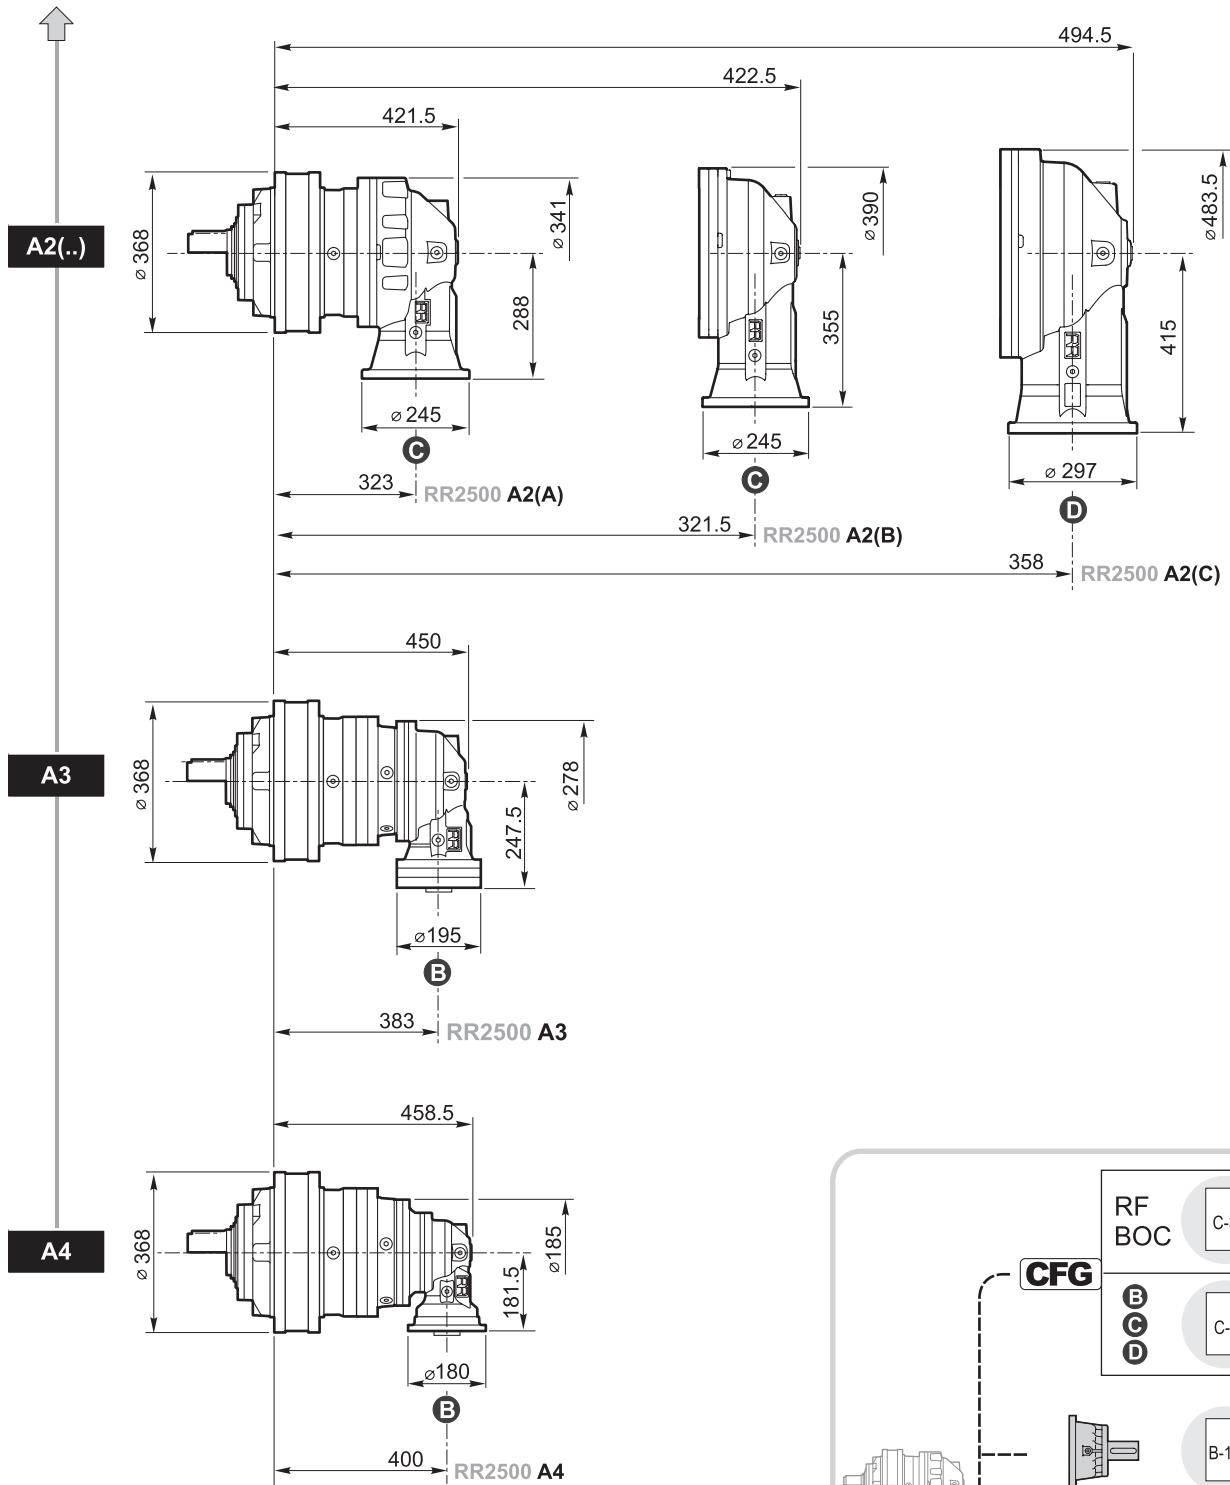




RR2500




IT EN DE FR ES PT


| | | | |
|--------|-----|-----------|---|
| RR2500 | L.. | MS | i |
| RR2500 | A.. | | i |

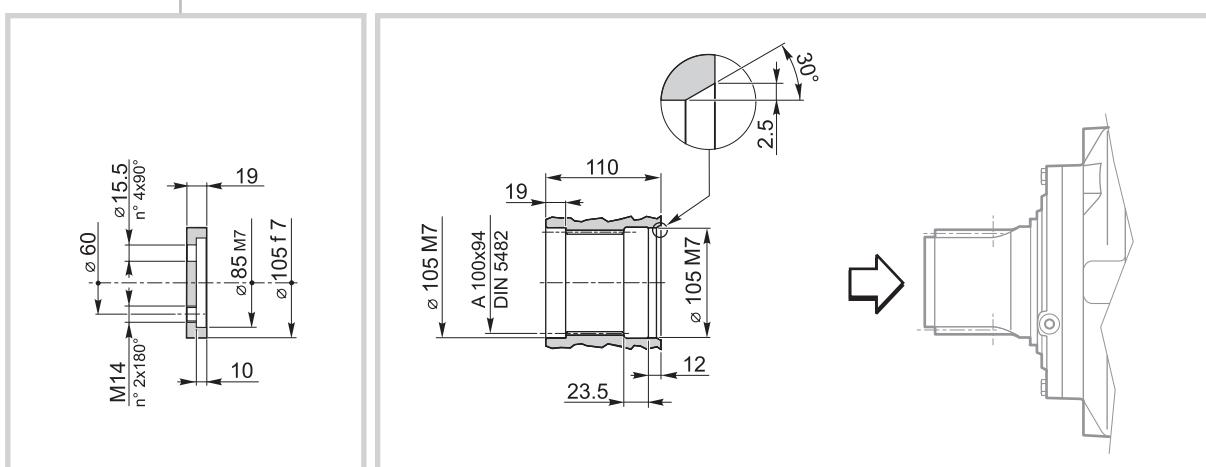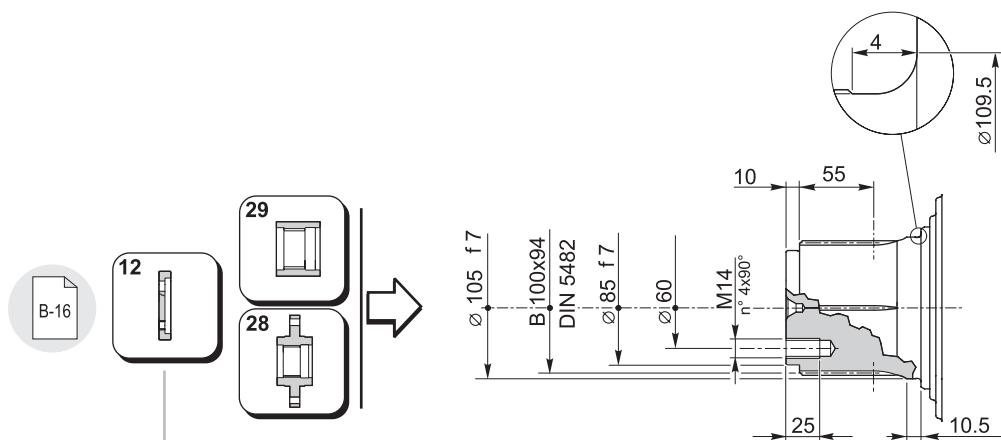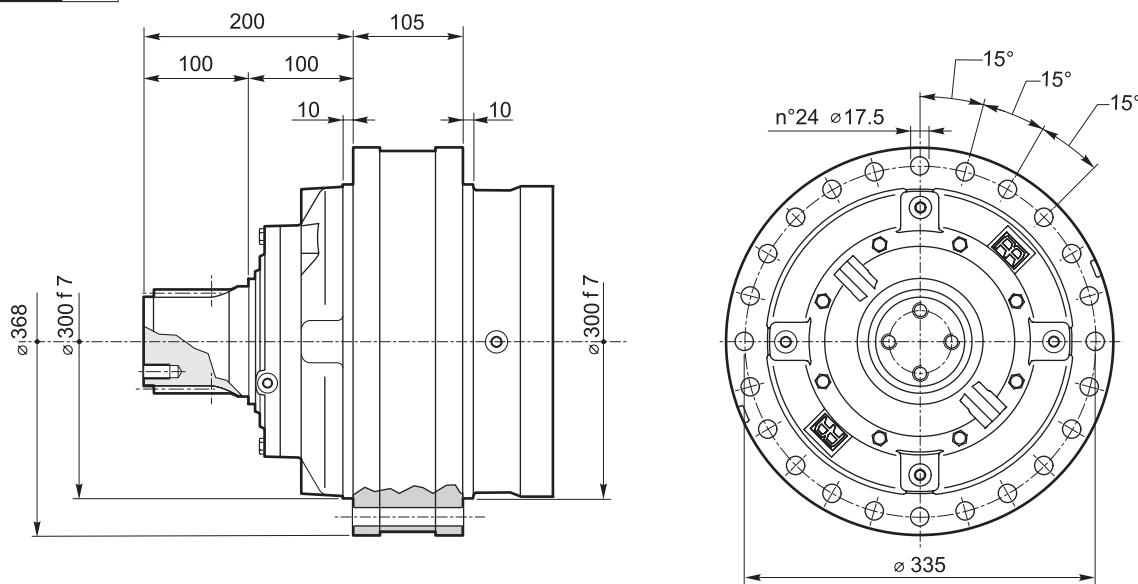



| | | | |
|--------|-----|----|---|
| RR2500 | L.. | MC | i |
| RR2500 | A.. | i | |

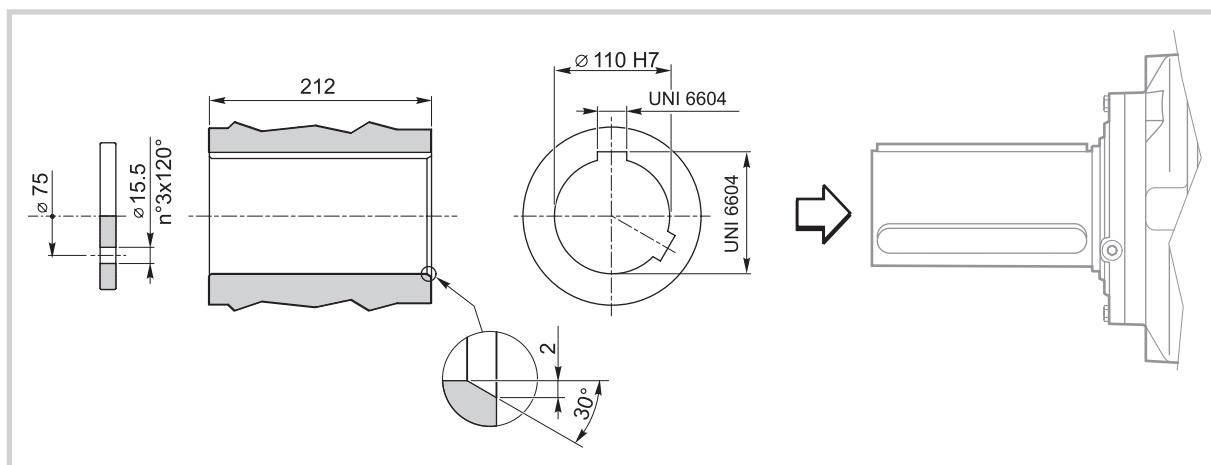
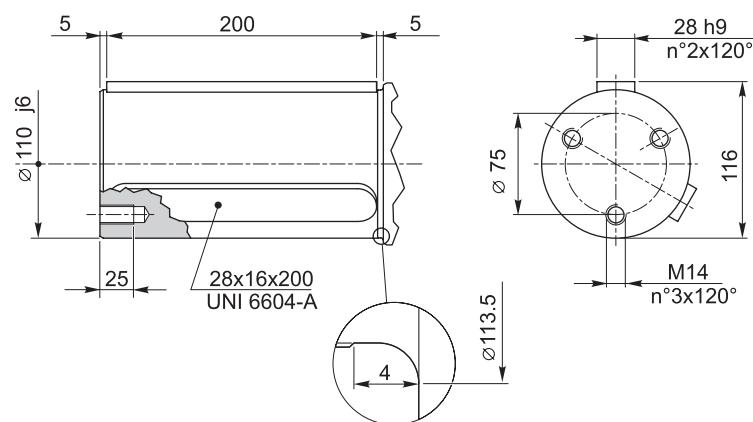
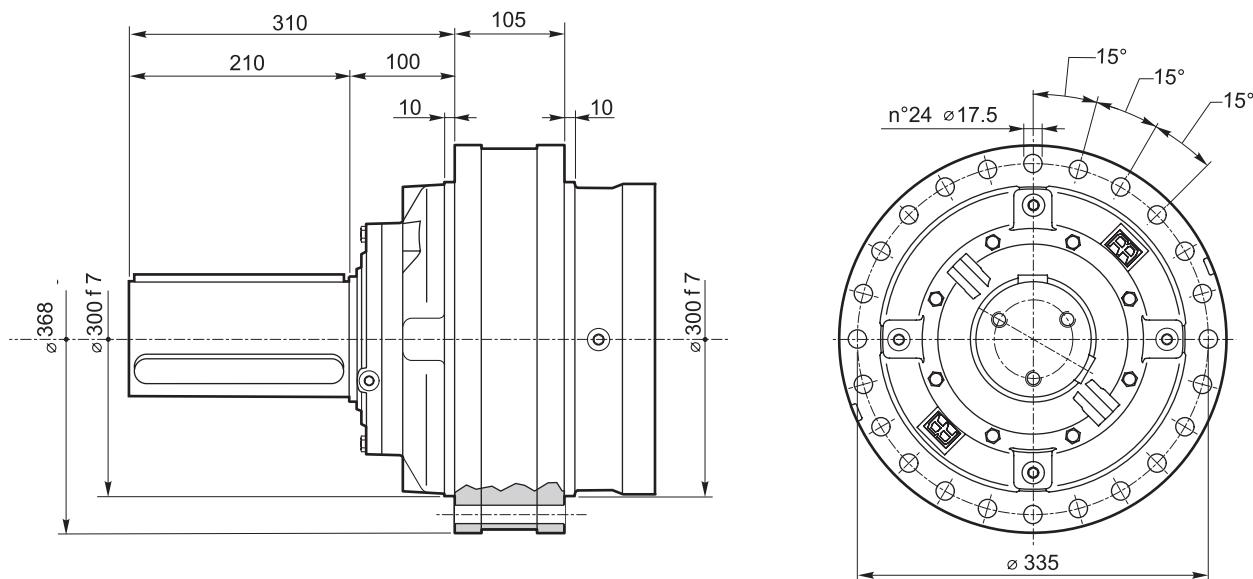




RR2500




IT EN DE FR ES PT

| | | | |
|--------|-----|----|---|
| RR2500 | L.. | FS | i |
| RR2500 | A.. | | i |

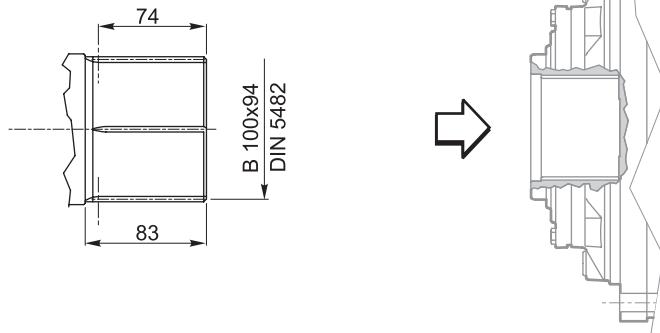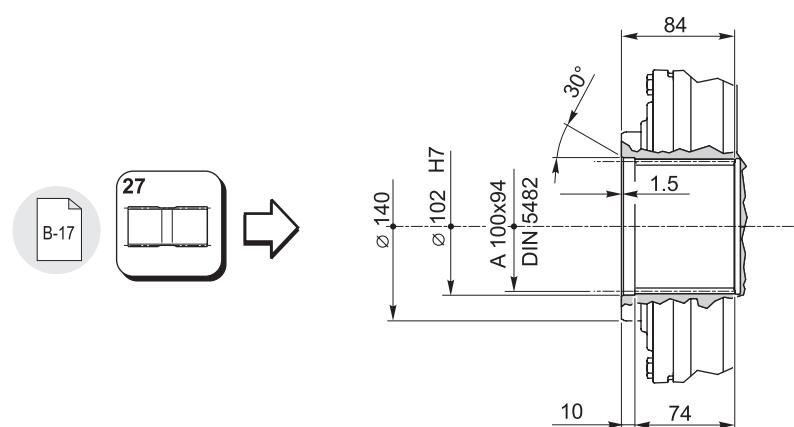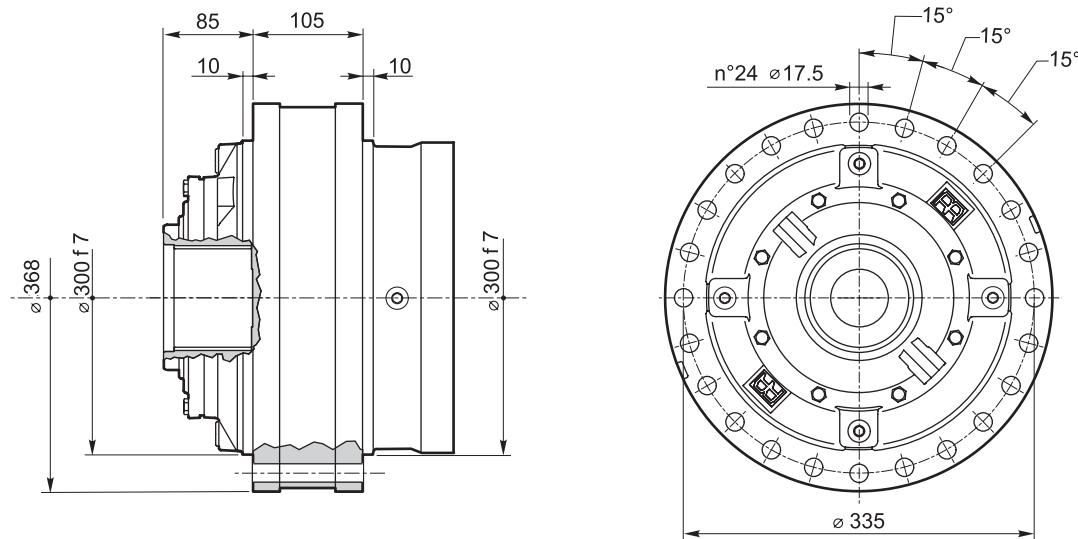




| | | | |
|--------|-----|----|---|
| RR2500 | L.. | MH | i |
| RR2500 | A.. | | i |

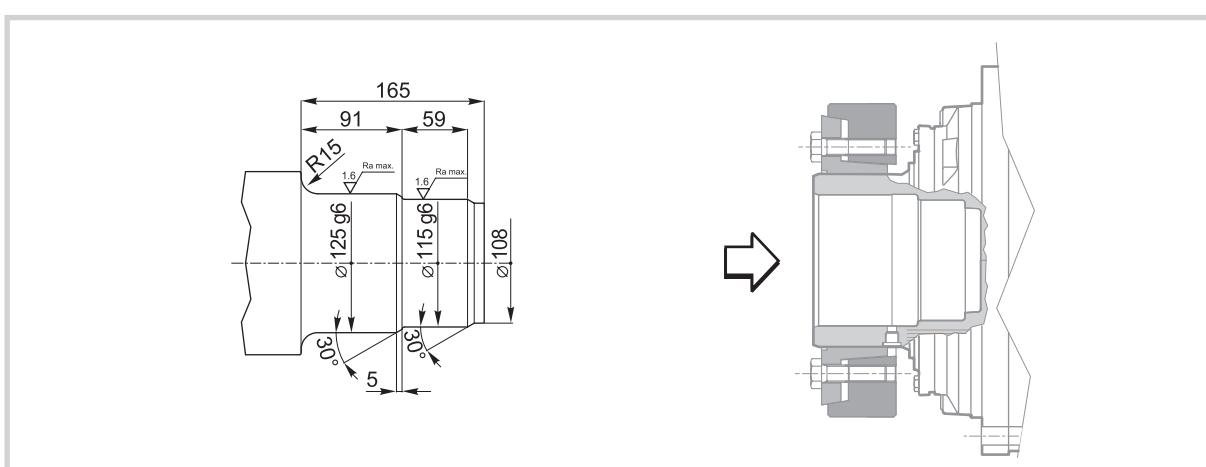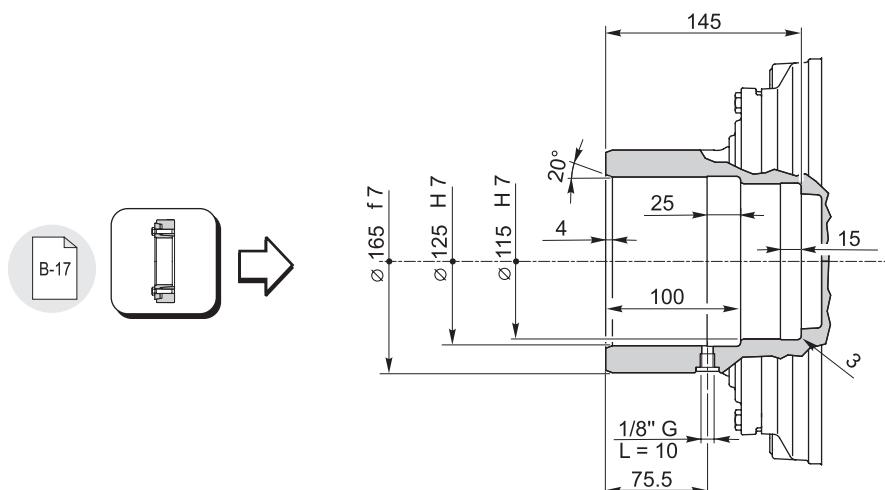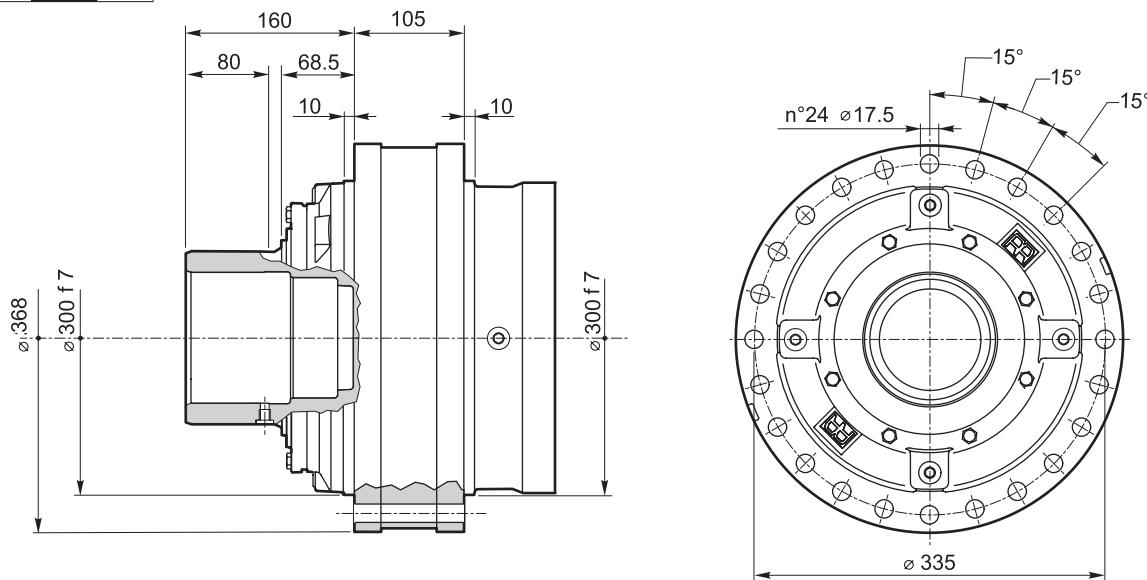



RR2500 L.. ZI i

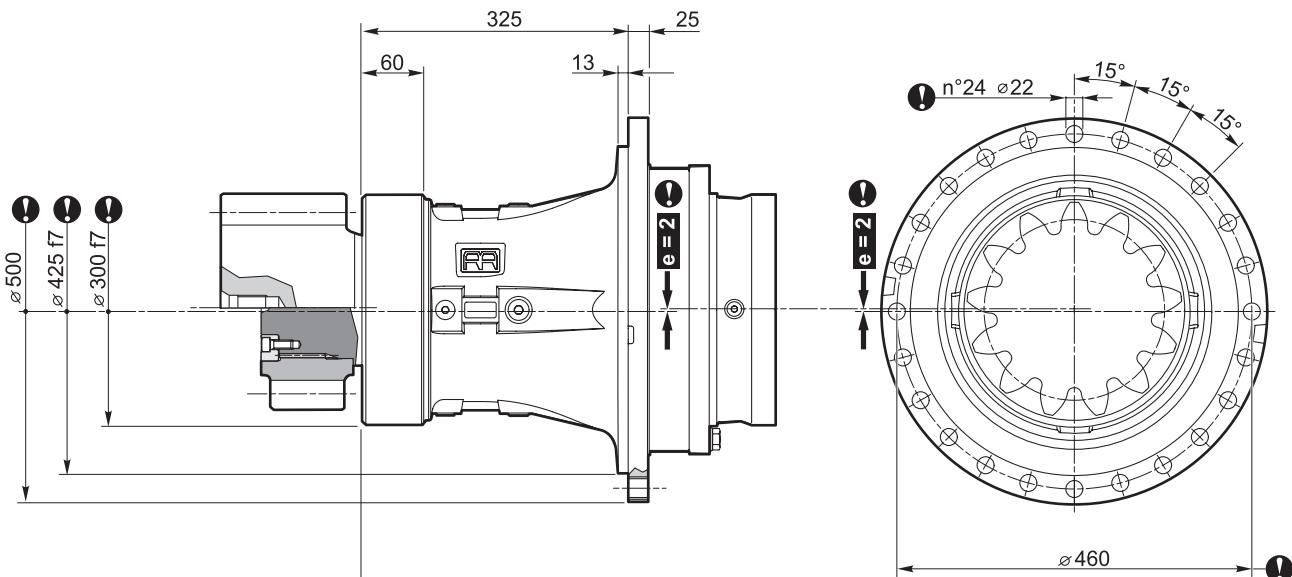

! Quote riferite all'asse con eccentricità "e"


Dimensions that refer to the axis with "e" eccentricity

Quoten beziehen sich auf die Achse mit Ausmittigkeit "e"

Cotes se rapportent à l'axe avec excentricité "e"

Quotas referidas ao eixo com excentricidade "e"



Cotas referidas al eje con excentricidad "e"

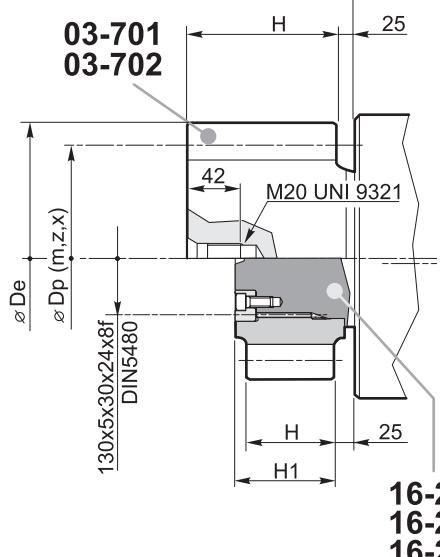


| m | z | x | H | H1 | Dp | De | code |
|----|----|--------|-----|-------|-----|-----|--------|
| 16 | 15 | 0.3125 | 160 | — | 240 | 282 | 03-701 |
| 12 | 13 | 0.5 | 110 | — | 156 | 190 | 03-702 |
| 14 | 14 | 0.5 | 105 | 114.5 | 196 | 238 | 16-245 |
| 18 | 12 | 0.5 | 140 | 140 | 216 | 265 | 16-247 |
| 18 | 13 | 0.4 | 140 | 140 | 234 | 279 | 16-248 |

IT EN DE FR ES PT


RR2500

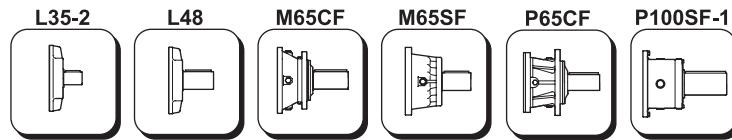

C-9

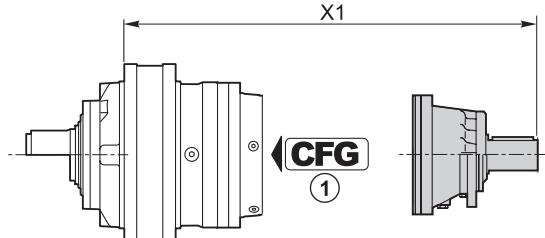


| | CFG ① | | code | X1 |
|------------------|-----------------|-----------------|------------|-------|
| RR2500 L1 | — | P100SF-1 | 154F3322 | 567.5 |
| RR2500 L2 | — | P65CF | 154-2404 | 596 |
| | RF | M65SF | 154B4249 | 536.5 |
| RR2500 L3 | RF | M65CF | 154-2407 | 559.5 |
| | BOC | L48 | 154B3989 | 473.5 |
| RR2500 L4 | BOC | L35-2 | 154-2190M1 | 509.5 |

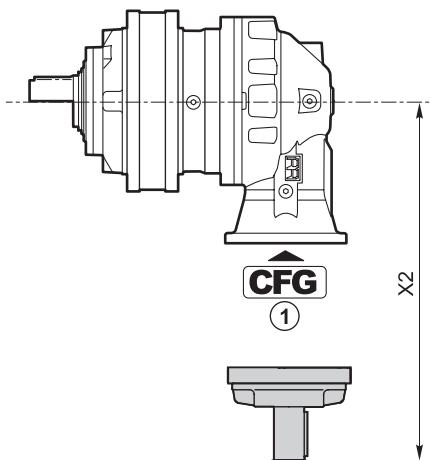

| | CFG ① | | code | X2 |
|---------------------|-----------------|-----------------|------------|-------|
| RR2500 A2(A) | — | P65CF | 154-2404 | 600 |
| RR2500 A2(B) | — | P65CF | 154-2404 | 667 |
| RR2500 A2(C) | — | P100SF-1 | 154F3322 | 791.5 |
| RR2500 A3 | BOC | L48 | 154B3989 | 348 |
| RR2500 A4 | BOC | L35-2 | 154-2190M1 | 271 |

| CFG | |
|-------------|-----|
| RF | C-3 |
| BOC | C-3 |
| B C D | C-3 |




RR2500

IT EN DE FR ES PT


RF170-290



RF5/..





RFF5/..



RF2/..




C-11

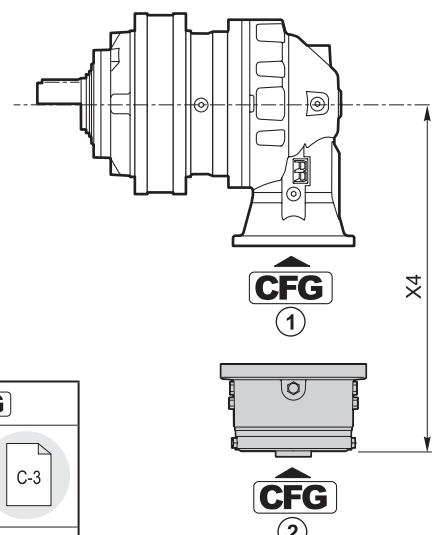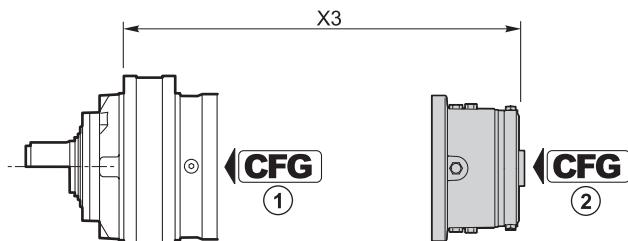


| RF170-290 | CFG ① | T _f [Nm] | CFG ② | | |
|--------------|----------|------------------------|------------|-----|-----|
| | | | C | | |
| | | code | X3 | X4 | |
| RR2500 L2 | RF | 1700 | 154B9766M4 | 481 | — |
| | | 2000 | 154B9767M4 | | |
| | | 2300 | 154B9768M4 | | |
| | | 2900 | 154B9769M4 | | |
| RR2500 A2(A) | — | 1700 | 154B9766M3 | — | 485 |
| | | 2000 | 154B9767M3 | | |
| | | 2300 | 154B9768M3 | | |
| | | 2900 | 154B9769M3 | | |
| RR2500 A2(B) | — | 1700 | 154B9766M3 | — | 552 |
| | | 2000 | 154B9767M3 | | |
| | | 2300 | 154B9768M3 | | |
| | | 2900 | 154B9769M3 | | |

| RF | CFG | |
|----|-----|-----|
| | C-3 | |
| | B | C-3 |


| RF5/.. | CFG ① | T _f [Nm] | CFG ② | | | | | | |
|-----------|----------|------------------------|----------|-------|----|-------------------|-------------------|-------|---|
| | | | B | | | OMTS 12/24 z16 | OMVS 10/20 z16 | | |
| | | | code | X3 | X4 | code | code | X3 X4 | |
| RR2500 L3 | RF | 210 | 154-2872 | 442.3 | — | 154-2879 | 154-2886 | 446 | — |
| | | 290 | 154-2873 | | | 154-2880 | 154-2887 | | |
| | | 430 | 154-2874 | | | 154-2881 | 154-2888 | | |
| | | 650 | 154-2875 | | | 154-2882 | 154-2889 | | |
| | | 850 | 154-2876 | | | 154-2883 | 154-2890 | | |
| | | 1100 | 154-2877 | | | 154-2884 | 154-2891 | | |
| | | 1300 | 154-2878 | | | 154-2885 | 154-2892 | | |



| RFF5/.. | CFG ① | T _f [Nm] | CFG ② | | | | | |
|-----------|----------|------------------------|----------|-------|----------|-------------------|-------------------|-------|
| | | | B | | | OMTS 12/24 z16 | OMVS 10/20 z16 | |
| | | | code | X3 | X4 | code | code | X3 |
| RR2500 A3 | RF | 210 | 154-2893 | 316.6 | 154-5338 | 154-5345 | — | 320.5 |
| | | 290 | 154-2894 | | 154-5339 | 154-5346 | | |
| | | 430 | 154-2895 | | 154-5340 | 154-5347 | | |
| | | 650 | 154-2896 | | 154-5341 | 154-5348 | | |
| | | 850 | 154-2897 | | 154-5342 | 154-5349 | | |
| | | 1100 | 154-2898 | | 154-5343 | 154-5350 | | |
| | | 1300 | 154-2899 | | 154-5344 | 154-5351 | | |

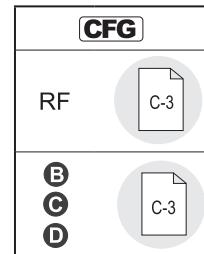

| RF2/.. | CFG ① | T _f [Nm] | CFG ② | | | | | | | | | | |
|-----------|----------|------------------------|-------------|-------|----|-----------------------------|------------------------------|-----------------------------|------------------------------|-------|-------|--|--|
| | | | B | | | OMP/OMR SAE A 2B Ø 25 | OMP/OMR SAE A 2B 1" 6B | OMP/OMR SAE A 4B Ø 25 | OMP/OMR SAE A 4B 1" 6B | | | | |
| | | | code | X3 | X4 | code | code | code | code | X3 | X4 | | |
| RR2500 L3 | RF | 70 | 154-2345 | 414.8 | — | 154-2345M10 | 154-2345M11 | 154-2345M16 | 154-2345M17 | 404.8 | — | | |
| | | 140 | 154-2346 | | | 154-2346M10 | 154-2346M11 | 154-2346M16 | 154-2346M17 | | | | |
| | | 210 | 154-2347 | | | 154-2347M10 | 154-2347M11 | 154-2347M16 | 154-2347M17 | | | | |
| | | 320 | 154-2348 | | | 154-2348M10 | 154-2348M11 | 154-2348M16 | 154-2348M17 | | | | |
| | | 430 | 154-2349 | | | 154-2349M10 | 154-2349M11 | 154-2349M16 | 154-2349M17 | | | | |
| | | 600 | 154B9186 | | | 154B9186M10 | 154B9186M11 | 154B9186M16 | 154B9186M17 | | | | |
| | | 70 | 154-2838M1 | | | 154-2863 | 154-2863M11 | 154-2635 | 154-2635M11 | | | | |
| | | 140 | 154-2839M1 | | | 154-2864 | 154-2864M11 | 154-2636 | 154-2636M11 | | | | |
| RR2500 L4 | RF | 210 | 154-2840M1 | 458.5 | — | 154-2865 | 154-2865M11 | 154-2637 | 154-2637M11 | 448.5 | — | | |
| | | 320 | 154-2841M1 | | | 154-2866 | 154-2866M11 | 154-2638 | 154-2638M11 | | | | |
| | | 430 | 154-2842M1 | | | 154-2867 | 154-2867M11 | 154-2639 | 154-2639M11 | | | | |
| | | 600 | 154B8962M1 | | | 154B9665 | 154B9665M11 | 154B9666 | 154B9666M11 | | | | |
| | | 70 | 154F2991 | | | | | | | | | | |
| | | 140 | 154F1890 | | | | | | | | | | |
| RR2500 A3 | RF | 210 | 154F2961 | 285.3 | — | | | | | | | | |
| | | 320 | 154B3591 | | | | | | | | | | |
| | | 430 | 154B3592 | | | | | | | | | | |
| | | 600 | 154F2992 | | | | | | | | | | |
| | | 70 | 154-2838M12 | | | 154-2863M12 | 154-2863M13 | 154-2635M12 | 213.8 | — | 213.8 | | |
| RR2500 A4 | RF | 140 | 154-2839M12 | | | 154-2864M12 | 154-2864M13 | 154-2636M12 | | | | | |
| | | 210 | 154-2840M12 | | | 154-2865M12 | 154-2865M13 | 154-2637M12 | | | | | |
| | | 320 | 154-2841M12 | | | 154-2866M12 | 154-2866M13 | 154-2638M12 | | | | | |
| | | 430 | 154-2842M12 | | | 154-2867M12 | 154-2867M13 | 154-2639M12 | | | | | |
| | | 600 | 154B8962M12 | | | 154B9665M12 | 154B9665M13 | 154B9666M12 | | | | | |




RR2500

IT EN DE FR ES PT




189
Nm

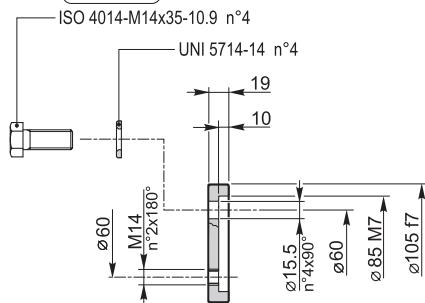

154F6030

Materiale / Material / Material / Matériau / Material / Material:
Acciaio / Steel / Stahl / Acier / Acero / Aço
EN 10083-1-42CrMo4+QT (1.7225)





556
Nm

2 ISO 4014-M20-10.9 n°16
2 UNI 5714-20 n°16

154F6047

Materiale / Material / Material
Matériau / Material / Material
Acciaio / Steel / Stahl / Acier / Acero / Aço
EN 10083-1-C40 (1.1186)

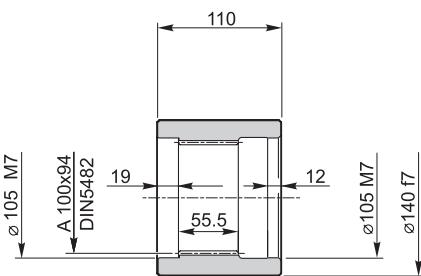

154F6055

Materiale / Materiale / Material / Matériau / Material / Material:
Acciaio / Steel / Stahl / Acier / Acero / Aço
EN 10083-1-42CrMo4+QT (1.7225)

1 Coefficiente d'attrito medio considerato: 0.14
Average friction coefficient considered: 0.14



Durchschnittlicher berücksichtigter Reibungskoeffizient: 0.14

Coefficient de frottement moyen considéré: 0.14


Coeficiente medio de fricción considerado: 0.14

Coeficiente de atrito medio considerado: 0.14

2 Componenti non forniti da Reggiana Riduttori
Components not supplied by Reggiana Riduttori
Nicht von Reggiana Riduttori gelieferte Komponenten
Parties pas fournies par Reggiana Riduttori
Componentes no suministrados por Reggiana Riduttori
Componentes não fornecidos por Reggiana Riduttori





27

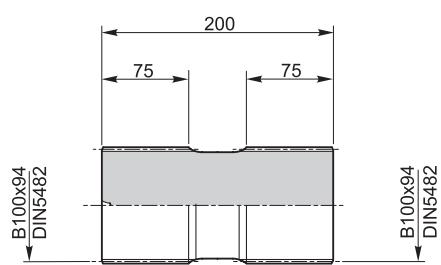


Materiale / Material / Material / Matériau / Material / Material:
Acciaio / Steel / Stahl / Acier / Acero / Aço
EN 10083-1-42CrMo4+QT (1.7225)

154F6036

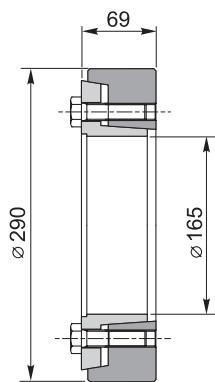

154F6065



RR2500

IT EN DE FR ES PT

