

<b>Motor Rated Power</b>			<b>5000W</b>	
--------------------------	--	--	--------------	--


<b>Inverter Power Supply</b>			<b>48Vdc</b>	
------------------------------	--	--	--------------	--

Description	Symbol	Unit		
Duty	-	-	S2-60min	
Nominal Speed	$n_n$	rpm	1500	
Frequency (N° poles)	$f (2p)$	Hz	133.3 (8)	
Costant Voltage	$K_e$	Vrms/Krpm	17.2	
Costant Torque	$K_t$	Nm/Arms	0.28	
Instant Torque	$T_i$	Nm	92.0	
Instant Current	$I_i$	Arms	400.0	
Peak Torque	$T_p$	Nm	51.0	
Peak Current	$I_p$	Arms	190.0	
Rated Torque	$T_r$	Nm	32.0	
Rated Current	$I_r$	Arms	115.0	
Rotor Inertia	$J_r$	kg x m <sup>2</sup>	0.012	
Ambient Temperature	$\theta_a$	°C	-15 ÷ +40	
Protection Degree	IP		IP 54	up to IP67
Insulation Class	-	-	F	
Thermal protection	-	-	KTY 84-130	


**PRELIMINARY**

Speed-Torque & Speed Power Motor Curves (\*)

SMAC 200-070

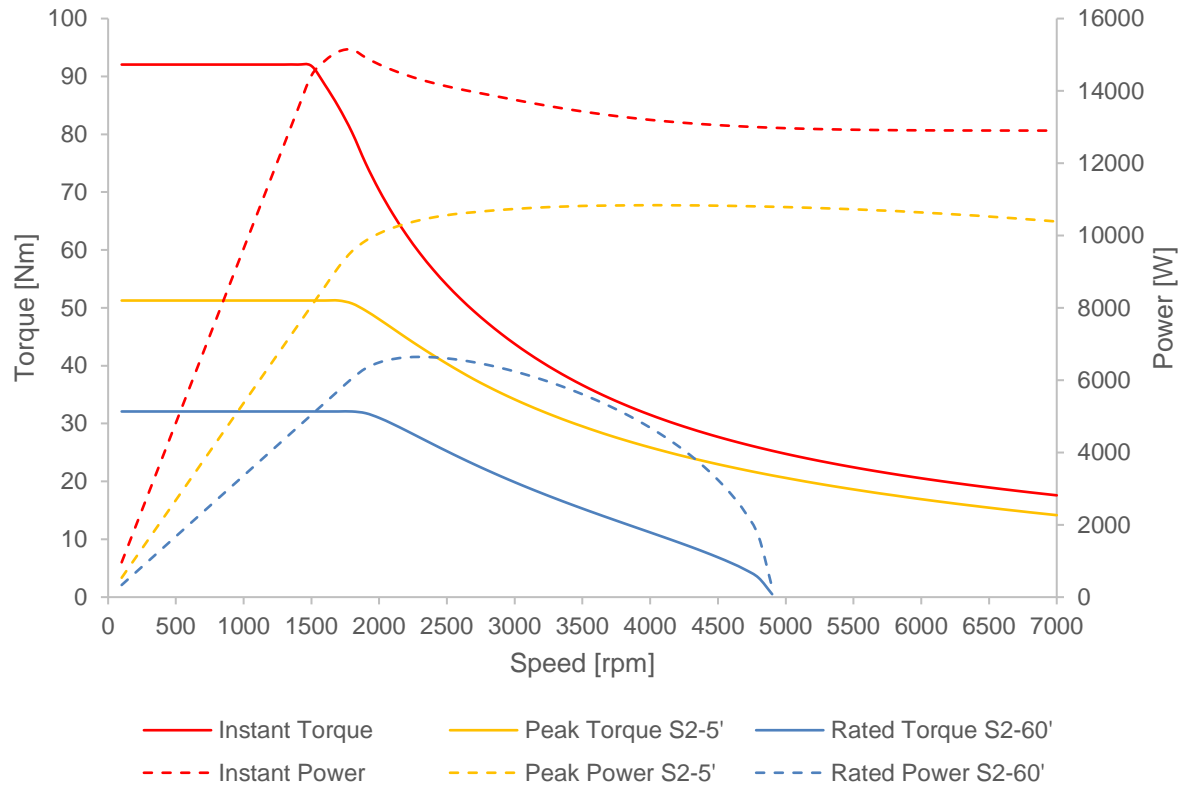

Efficiency Map % (\*)

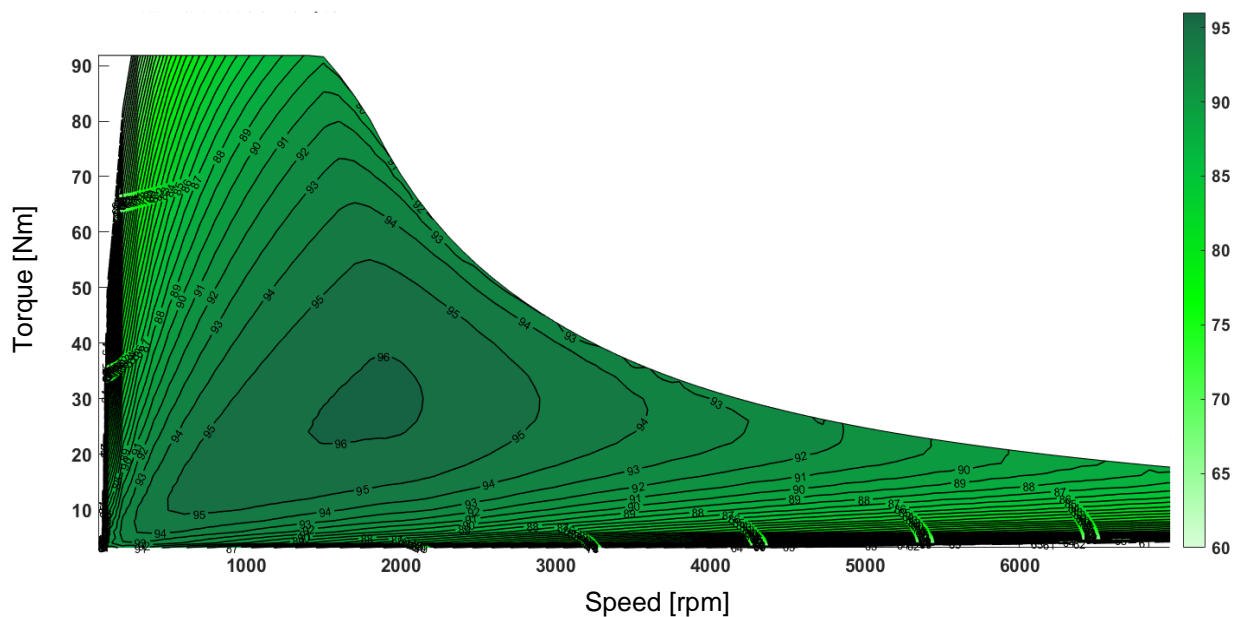

\* MTPA Field Weakening strategy control & Optimized Advance Angle