


**BVTS Thermostatic Valve**

<p><b>BVTS</b></p>	<b>Application</b>	solid-fuel boiler protection from overheating
	<b>Purpose</b>	By opening cold water inlet, it prevents boiler overheating by discharging heat from a recooling heat exchanger in case of emergency. It also prevents backburning in a biomass fuel store by flooding the fuel (see the valve connection diagram)
	<b>Working fluid</b>	water
	<b>Installation position</b>	can be installed in any position; the sensor shall be located in the hottest place
	<b>Valve function</b>	automatic operation depending on the sensor temperature
	<b>Opening temperature</b>	the opening temperature depends on the valve type (see the table on page 2)
	<b>Valve adjustment</b>	the valve is factory adjusted; no user adjustments possible
	<b>Valve opening</b>	when the temperature at sensor increases the pressure inside the sensor grows and is transferred to the valve pin via the capillary tube and bellows. When the opening temperature is reached, the pressure in bellows exceeds the spring load so the pin lifts up and the valve opens. For manual opening, the valve is fitted with an activation button.

The valve meets the requirements set by the Pressure Equipment Directive (PED) 97/23/EC and EN 14597. Its design fulfils the requirements for a device to dissipate excess heat, as of Art. 4.3.8.4, EN 303-5. This is a STW device, Th type, according to EN 14597:2012.

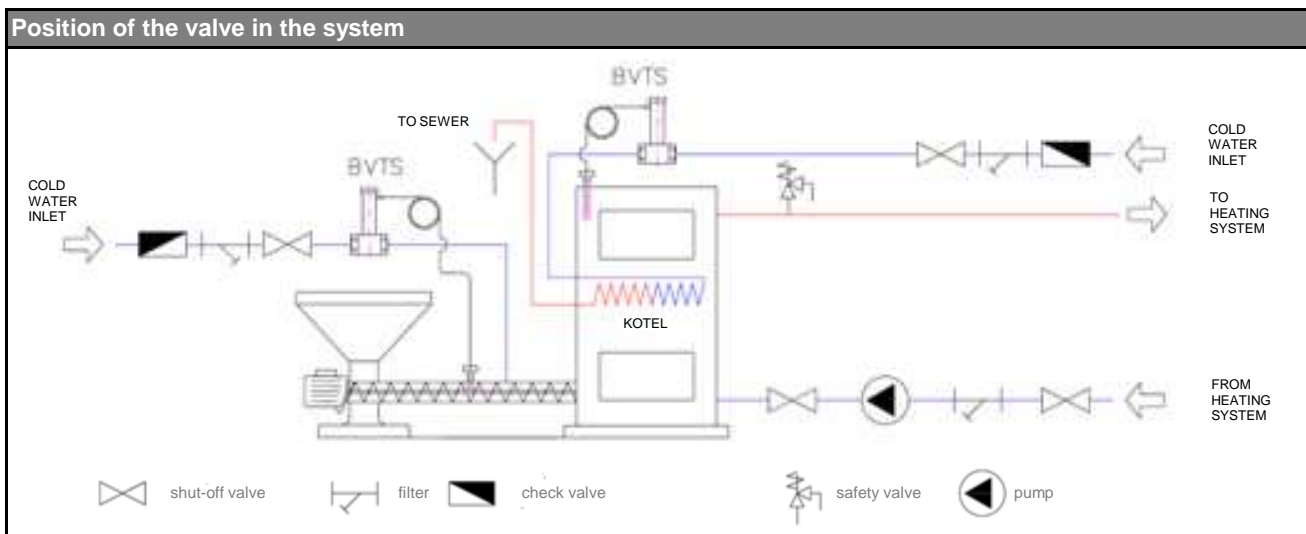

*Before the assembly is finished, the opening temperature is set for each valve and the valve is tested. During the test the valve is tested for pressure, leaks and the opening temperature.*

**Thermostatic valve must not be used to replace a heat source safety valve.**

**BVTS Thermostatic Valve**

DIMENSIONAL DRAWING		Technical data	
		Nominal diameter	DN 20
		Pipe connection	G 3/4" F
		Connection to heat source	G 1/2" M
		Nominal pressure	PN 10
		Heating fluid max. working pressure	6 bar
		Cooling water max. working pressure	10 bar
		Ambient temperature	0 to 80 °C
		Hysteresis	6 °C
		K <sub>vs</sub> at the opening temp. t <sub>OT</sub> + 13 °C	2.6 m <sup>3</sup> /h
		Materials	
		Valve body, outer metal parts	forged brass
		Inner metal parts	forged brass
		Spring	stainless steel
		Sensor	copper
		Capillary tube	copper
		Sheath	brass
		Activation push button	ABS
		O-rings and sealing inserts	EPDM, NBR

BVTS Type	L [mm]	H [mm]	Valve opening temp. t ± 2 °C [°C]	Max. sensor temp. [°C]	Capillary version [-]	Weight [kg]	Code
050-R130-P14	1 300	140	50	75	removable	0,7	14 473
055-F130-P14	1 300	140	55	80	fixed	0,7	14 474
065-F130-P14	1 300	140	65	90	fixed	0,7	14 475
065-F130-P16	1 300	160	65	90	fixed	0,7	14 643
070-F130-P14	1 300	140	70	95	fixed	0,7	14 476
095-F130-P14	1 300	140	95	125	fixed	0,7	14 477
095-F400-P14	4 000	140	95	125	fixed	1,0	14 478
095-R130-P14	1 300	140	95	125	removable	0,7	14 479
097-F130-P14	1 300	140	97	125	fixed	0,7	14 480
100-R130-P14	1 300	140	100	125	removable	0,7	14 481
100-R130-P22	1 300	220	100	125	removable	0,7	14 482
108-F130-P14	1 300	140	108	133	fixed	0,7	14 483