


Motor Rated Power	12000W
--------------------------	---------------


Inverter Power Supply	400Vdc
------------------------------	---------------

Description	Symbol	Unit		
Duty	-	-	S2-60'	
Nominal Speed	n_n	rpm	3500	
Frequency (N° poles)	$f (2p)$	Hz	233.3 (8)	
Costant Voltage	K_e	Vrms/Krpm	60.0	
Instant Torque	T_i	Nm	92.0	
Instant Current	I_i	Arms	120.0	
Peak Torque S2-5'	T_p	Nm	63.0	
Peak Current S2-5'	I_p	Arms	62.0	
Peak Torque S2-30'	T_p	Nm	47.0	
Peak Current S2-30'	I_p	Arms	50.0	
Rated Torque S2-60'	T_r	Nm	33.0	
Rated Current S2-60'	I_r	Arms	36.0	
Short Circuit Current	I_{sc}	Arms	52.0	
Rotor Inertia	J_r	kg x m ²	0.010	
Ambient Temperature	θ_a	°C	-15 ÷ +40	
Protection Degree	IP		IP 54	up to IP67
Insulation Class	-	-	F	
Thermal protection	-	-	PTY 84-130	Alternative to KTY 84-130

Speed-Torque & Speed Power Motor Curves (*)

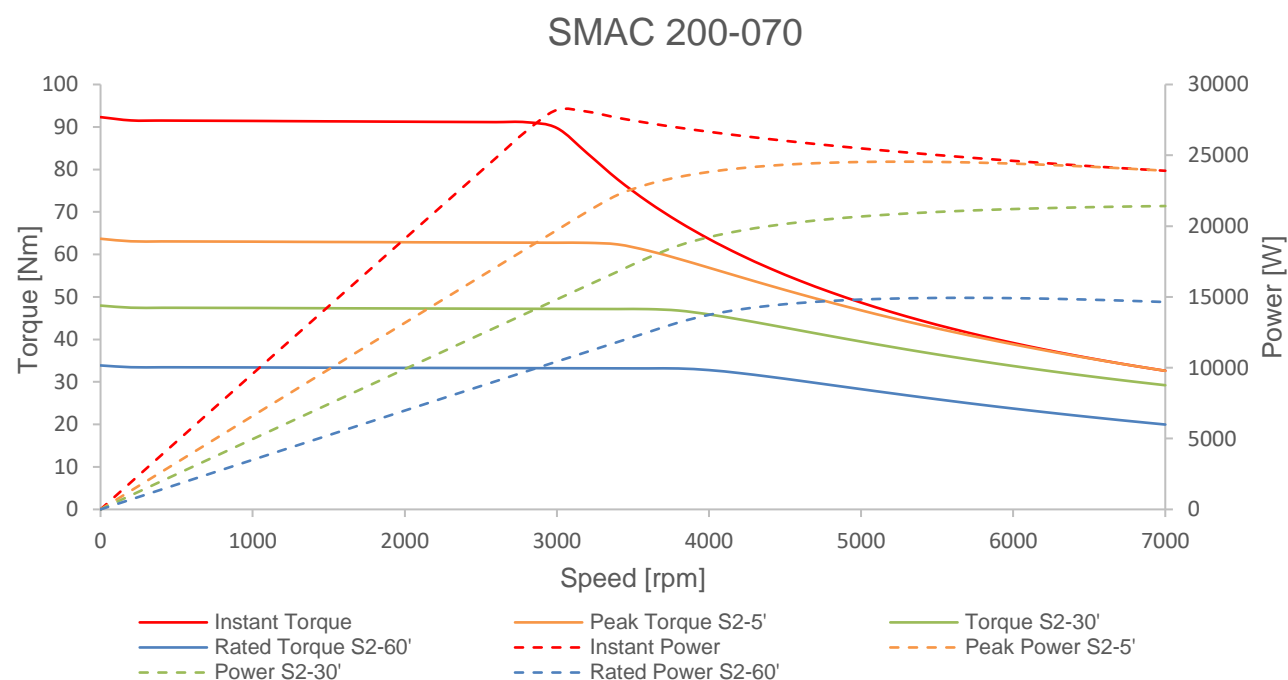


Current Map [Arms]

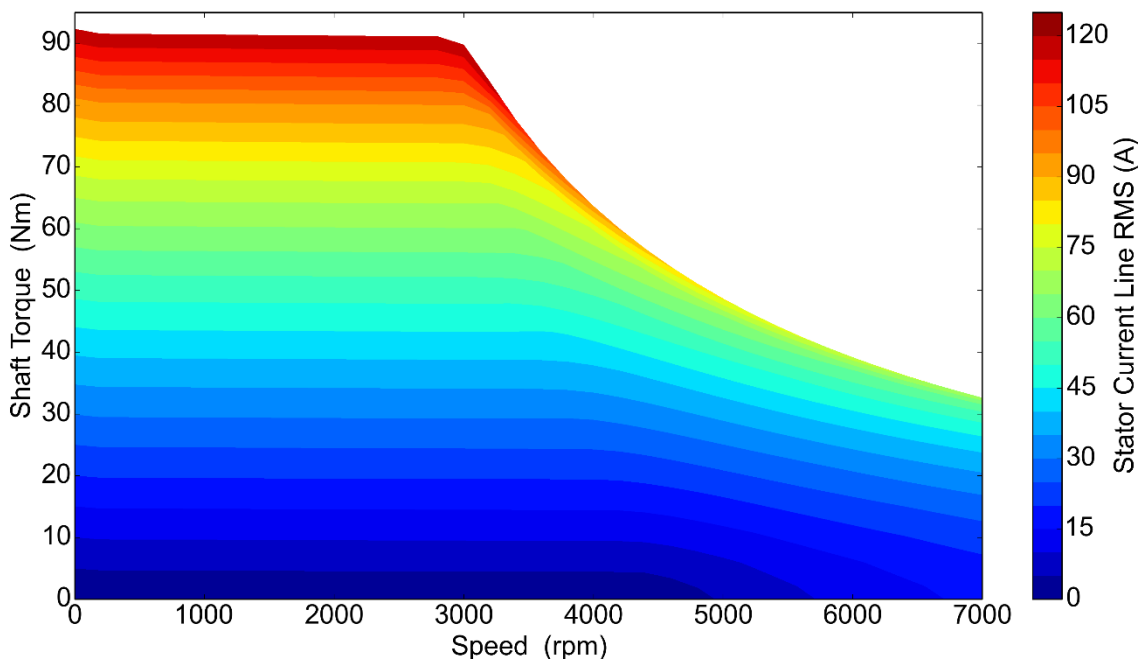

* MTPA – MTPV Field Weakening strategy control & Optimized Advance Angle
(Ref. Simulation temperature 20.0°C)

Simulation Only

Efficiency Map % (*)

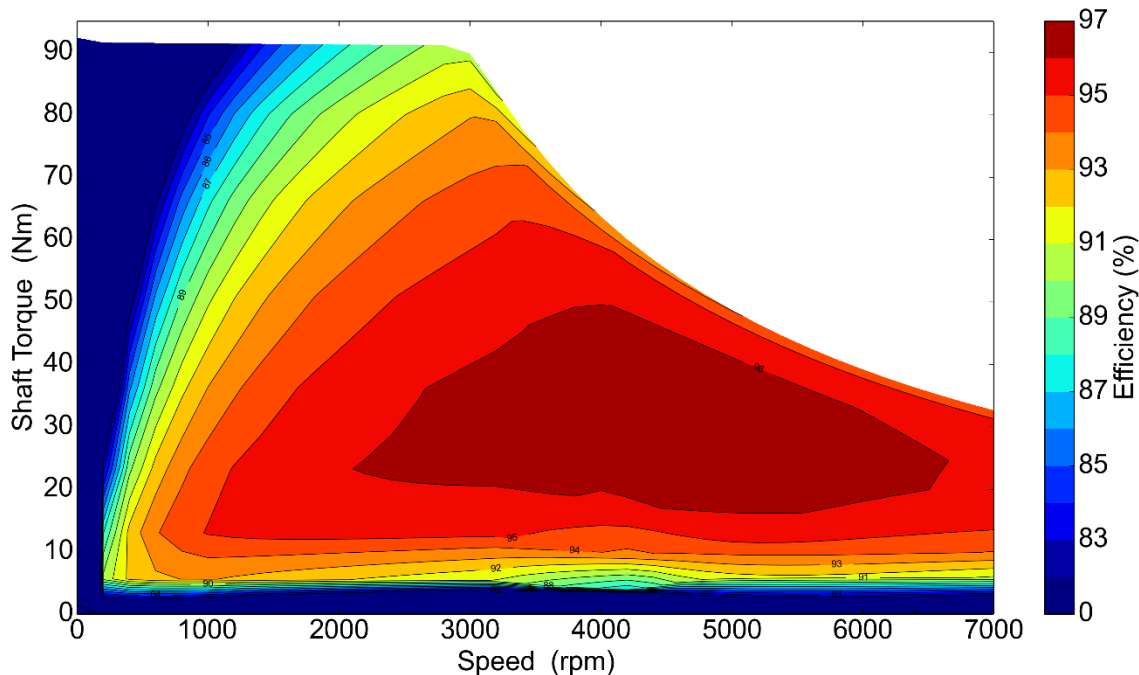

PRELIMINARY - Simulated Data